

Han[®] HPTC

High Performance Transformer
Connector




Pushing Performance
Since 1945

For further information, please reach out to
techsupportUS@HARTING.com

PORTFOLIO RANGE

Straight housings and angled plugs with current carrying capacity up to 1400A.

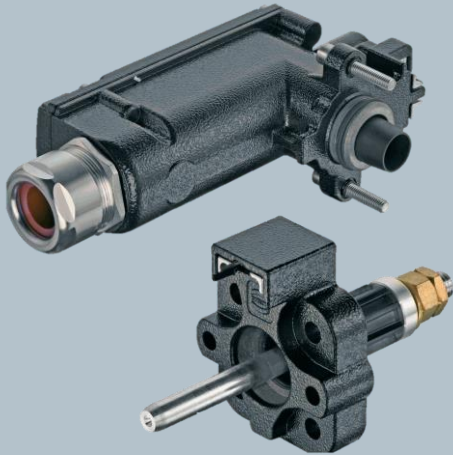

1800V AC/DC
400A
360° Shielding



3600V AC/DC
850A
360° Shielding



3600V AC/DC
1400A
360° Shielding

KEY FEATURES



Vibration
Proof



Robust
Design



Easy
Installation



High
Protection



Large
Temperature
Range



16 Coding Options

Flexible keying options eliminate mis-mating



APPLICATION AREAS



Energy Storage Systems



Power Conversion Equipment



Heavy Machinery Power
Interfaces



Transportation