


1.2 – 1.4 GHz Application Circuit - Layout


Board material is RO4350B 0.020" thickness with 2oz copper cladding. Overall EVB size is 3.98" x 3.98".

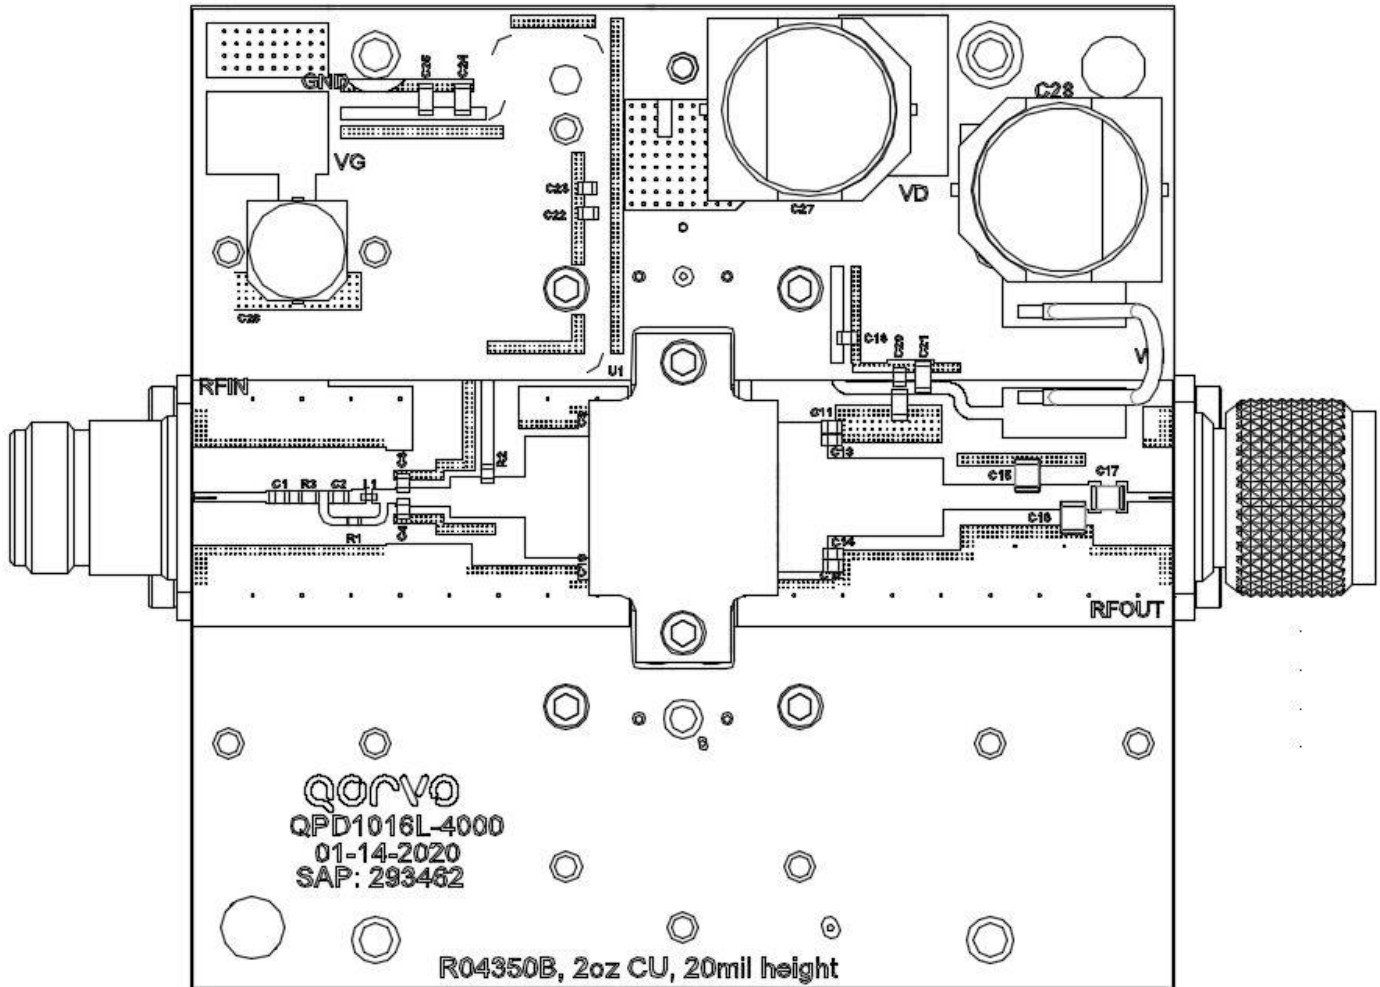

1.2 – 1.4 GHz Application Circuit - Bill Of Material

Description	Ref. Des.	Manufacturer	Part Number
Capacitor 27pF, 250v, 1% NPO 0805 600F	C1, C2	American Technical Ceramics	600F270FT250XT
Capacitor 2.7 pF, 250V, 0805, 600F	C3, C4	American Technical Ceramics	600F2R7BT250XT
Capacitor 10 pF, 600F-Series	C9, C10	American Technical Ceramics	600F100CT
Capacitor 3.3 pF, 600F-Series	C11, C12	American Technical Ceramics	600F3R3CT
Capacitor 4.7 pF, 600F-Series	C13, C14	American Technical Ceramics	600F4R7CT
Capacitor 1.2 pF, 2%, 500v, COG 800B	C15	American Technical Ceramics	800B1R2CT500X
Capacitor 1.5 pF, 2%, 500v, COG 800B	C16	American Technical Ceramics	800B1R5CT500X
Capacitor 56 pF, 2%, 500v, COG 800B	C17	American Technical Ceramics	800B560JT500X
Capacitor 47 pF, 5%, 250V, 0805, 600F	C18, C22	American Technical Ceramics	600F470JT250XT
Capacitor 100 pF, 600F-Series	C20, C23	American Technical Ceramics	600F101JT
Capacitor, 100nF, 10%, 100V X7R1206	C19, C24	N/A	N/A
Capacitor, 1uF, 20%, 100V X7R1206	C21, C25	Murata	GRM32ER72A105MA01L
Capacitor 220 uF, 20%, 100V, SMD Electrolytic	C27, C28	Nichicon	UUJ2A221MNPQ1MS
Capacitor 220 uF, 20%, 50V, SMD Electrolytic	C26	Panasonic	EMVY500ADA221MJA0G
Resistor, 390 Ohm, 1%, 1/10W, 0805	R1	Rohm Electronics	MCR03EZPFX6200
Resistor, 10 Ohm, 1%, 1/10W, 0805	R2	Panasonic	ERJ-6ENF10R0V
Resistor, 6.04ohm, 1%, 1/10W, 0805	R3	Panasonic	RC0805FR-076R04L

1.2 – 1.4 GHz Application Circuit - Schematic

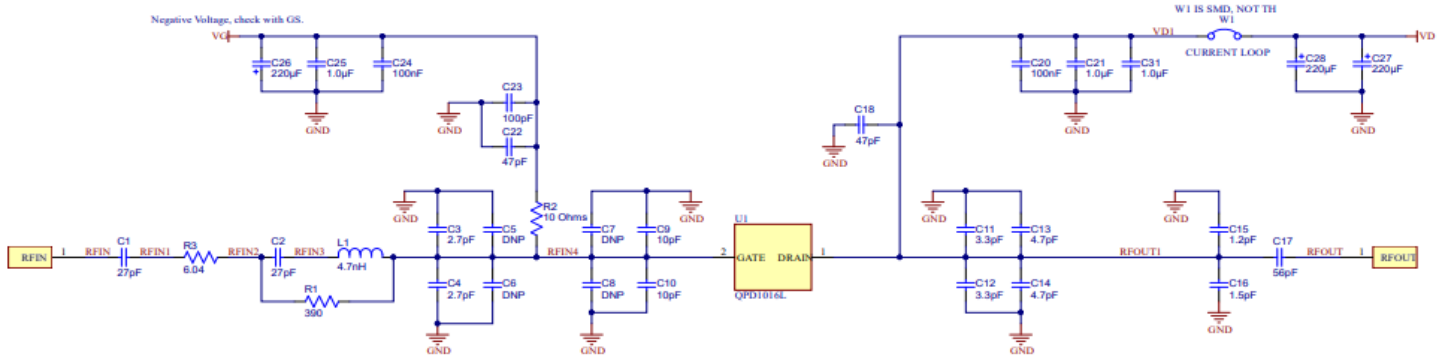

Bias-up Procedure

1. Set V_G to -4 V.
2. Set I_D current limit to 1100 mA.
3. Apply 50 V V_D .
4. Slowly adjust V_G until I_D is set to 1000 mA.
5. Set I_D current limit to 7 A (Pulsed operation)
6. Apply RF.

Bias-down Procedure

1. Turn off RF signal.
2. Turn off V_D
3. Wait 2 seconds to allow drain capacitor to discharge
4. Turn off V_G