



SORACOM

Onyx LTE™ USB Modem

IoT/M2M-optimized LTE Cat 4 USB Modem

IoT Connectivity and Platform Services

Soracom provides IoT connectivity and platform services to over 25,000 businesses and over 6M connections, with solutions for every challenge in IoT. We're focused on making it easy to connect M2M devices at scale, with a powerful IoT SIM that provides connectivity in 160 countries. Soracom provides direct integrations with the world's leading cloud platforms, making it easy to transmit data from your device to AWS, Google Cloud Platform, or Microsoft Azure.

Our team of IoT experts is on hand to learn more about your challenges, and to discuss how Soracom can help at every stage of your product development lifecycle.



No
Lock In's



Flexible
Plans



Cloud
Agnostic



Total
Visibility

www.soracom.io

©2023 Soracom All Rights Reserved. v1.1-122023



The **Soracom Onyx LTE™ USB Modem** is a high performance communications device that enables cellular data connectivity for fixed and mobile applications, such as smart agriculture, healthcare, asset tracking, and remote management applications.

Onyx features a Quectel® EG25-G LTE Cat. 4 module which provides global 4G/LTE, 3G, and 2G cellular connectivity in a single device and is optimized specifically for IoT and M2M applications. With a USB port and driver support for Linux, Onyx can be installed on a wide variety of devices to easily add global cellular data connectivity.

Onyx includes built-in antennas for easy installation without extra wires or accessories, and also provides two external CRC9 antenna connectors to support custom antenna configurations.

Onyx also features built-in application protocols such as TCP, UDP, PPP, FTP, HTTP, and MQTT, allowing devices to integrate into various system architectures and cloud services quickly without the need for custom code.

Soracom Onyx LTE™ USB Modem



4G/3G/2G technology

USB interface

Application protocols

AT commands

Global network compatibility

SMS & USSD


Status LED

Features

- Global 4G/LTE, 3G, and 2G network compatibility
- Compact, rugged design
- Easy installation
- Integrated antennas
- Built-in application protocols
- Soracom Connectivity Management Platform included at no additional cost

Which Soracom Onyx LTE™ USB Modem is right for your project?

eSIM Embedded

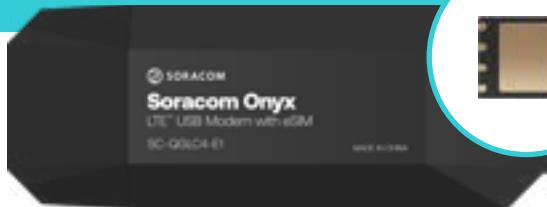


Soracom Onyx LTE™ USB Modem with global eSIM (Air plan01s)

Part #: 4573326591591

- ✓ Most advanced and durable
- ✓ Soracom Industrial Grade MFF2 eSIM embedded
- ✓ Global multicarrier connectivity designed for IoT
- ✓ Vibration and tamper resistant
- ✓ Resists extremes of temperature and humidity
- ✓ Switch Soracom plans with Subscription Containers

IoT SIM Installed

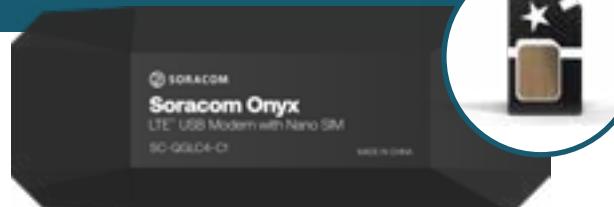

Soracom Onyx LTE™ USB Modem with global Nano SIM pre-inserted (Air plan01s)

Part # 4573326592604

- ✓ Simplest
- ✓ Soracom nano IoT SIM pre-installed
- ✓ Global multicarrier connectivity designed for IoT
- ✓ Switch Soracom plans with Subscription Containers
- ✓ SIM card can be replaced manually

No SIM included

Soracom Onyx LTE™ USB Modem with 4FF SIM slot (SIM sold separately)

Part #: 4573326591584

- ✓ No SIM included
- ✓ Manually install your SIM card of choice
- ✓ Does not include Soracom Connectivity Management Platform



Technical Specifications

CONNECTIVITY	Modem	EG25-G
	Region	Global
	Performance	LTE Cat. 4 (3GPP Release 11)
	Network Bands	4G LTE-FDD B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/B19/B20/B25/B26/B28
		LTE-TDD B38/B39/B40/B41
		3G UMTS B1/B2/B4/B5/B6/B8/B19
	2G	GSM 850/900/1800/1900
	Packet Data	Max. 150Mbps downlink / Max. 50Mbps uplink
	Compatibility	3GPP TS 27.007, TS 27.005, Enhanced AT Commands
	Protocols	TCP, UDP, PPP, FTP, HTTP, MQTT, NTP, NITZ, PING, QMI
APPLICATION	Messaging	SMS, USSD
	Operating Systems	Linux
	USB	USB 2.0 Type A
INTERFACES	Antenna	Built-in, 2 x CRC9
	Operating Voltage	USB powered, 4.2V ~ 6.0V
	Power Consumption	35mA (idle, typical), 600mA (during communication, typical)
	Dimensions	95mm x 36mm x 13mm
PHYSICAL	Weight	36g
	Casing	PC-ABS
	Temperature Range	-20°C ~ 60°C (operation), -35°C ~ 85°C (storage)
	Humidity	5% ~ 75% (operation, non-condensing), Max. 80% (storage, non-condensing)
	Minimum Order Quantity	One
PACKAGING AND ORDERABLE QUANTITIES	Order Multiple	One
	Number of Devices per Pack	One
	Packaging Type	Box
	Box Dimensions	120mm x 70mm x 20mm
CERTS	Regulatory	FCC, PTCRB, JATE, TELEC, CE, UKCA, KC
	Safety	RoHS

