



RadCrimp® Solar Splice with Melni Spiral Termination Technology


Amphenol Industrial Operations offers the RadCrimp® Solar Splice, certified to meet UL and IEC62852 1500V DC standards and featuring Melni spiral termination technology. This groundbreaking solution eliminates improper mating, streamlines installation by eliminating the need for crimping and expensive equipment, and enhances safety. RadCrimp® represents a leap forward in solar splice technology, providing a reliable and efficient connection solution for the evolving solar industry. It reflects Amphenol's commitment to excellence and innovation in the field.

Features:

- Simple and fast termination
- Field termination and sealing without special crimp tools
- Available for 12~ 6 AWG PV wires
- IP68 Sealing protection
- Certified according to UL6703 and IEC62852 1500V DC
- The revolutionary spiral termination technology is the solution for low resistance and long term reliability



Technical Data	
Rated voltage	UL6703 & IEC62852 1500V DC
Rated current (UL)	20A (4.0mm ² / 12AWG), 30A (6.0mm ² / 10AWG) 50A (10.0mm ² / 8AWG) , 65A (16mm ² / 6AWG)
Insulation material	Thermoplastic (PC/PA)
Contact material	Tin over nickel plated copper alloy
Application class	Class A
Overvoltage category	III
Degree of protection	IP68 (1 meter, 24 hours) mated
Flame class	UL94-V0
Cable OD range	Ø6.0mm ~ 7.4mm (12 / 10AWG) Ø8.0mm ~ 9.3mm (8 / 6AWG) Ø8.8mm ~ 10.2mm (8 / 6AWG)
Cable strands range	7 ~ 60 strands (12AWG / 10AWG) 7 ~ 19 strands (6AWG / 16mm ²) 19 ~ 168 strands (8AWG / 10mm ²)
Pollution degree	2
Safety class	Class II
Ambient temperature range	-40°C ~ +85°C
Upper limiting temperature	115°C
UV resistance	Outdoor suitable(fi) rated materials, per UL746C

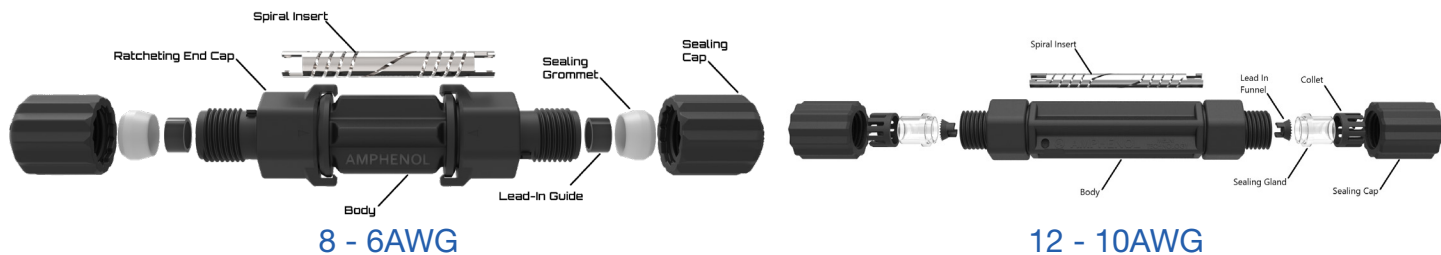

How to Order RadCrimp® Solar Splice with Melni Spiral Termination Technology (please choose one code per position, below)

1		2		3		4	
Product Line		Product Type		Cable Size		Terminal Type	
AMPV	Amphenol Solar connector (RadCrimp®)	STS	Spiral termination	4	Ø6.0mm ~ 7.4mm (12 / 10AWG)	M	Machined Terminal
				8	Ø8.0mm ~ 9.3mm (8 / 6AWG)		
				9	Ø8.8mm ~ 10.2mm (8 / 6AWG)		

Tools	Ordering Code
Wrench tool for 12AWG & 10AWG	AMPVTW0001
Wrench tool for 8AWG & 6AWG	AMPVTW0002



Notice: Specifications are subject to change without notice. Contact your nearest Amphenol Corporation Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements of suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all connectors.

Headquarters:
Amphenol Industrial Operations
20 Valley Street
Endicott, NY 13760
Tel: (888) 364-9011
amphenol-industrial.com

Corporate:
Amphenol World Headquarters
358 Hall Avenue
Wallingford, CT 06492
Tel: (203) 265-8900
amphenol.com

Email: tech@amphenol-aio.com