

# BOARD-TO-BOARD GUIDE POST STANDOFF

## GPSOM SERIES

### GPSOM

Use With:  
NVAX, APX6, ADX6,  
UMPX, UDX6

### GPSOM

### BOARD STACK HEIGHT

Specify  
BOARD STACK  
HEIGHT  
from chart

### LEAD STYLE

**-01**  
= Press-In with Nut

### MATERIAL


**-01**  
= 303 Stainless Steel  
with MIL-C-13924  
black oxide finish

### KIT OPTION

Leave blank for kit  
**-N**  
= No hardware  
(Standoff only)

### SPECIFICATIONS

**Material:**  
Stainless Steel with  
black oxide finished

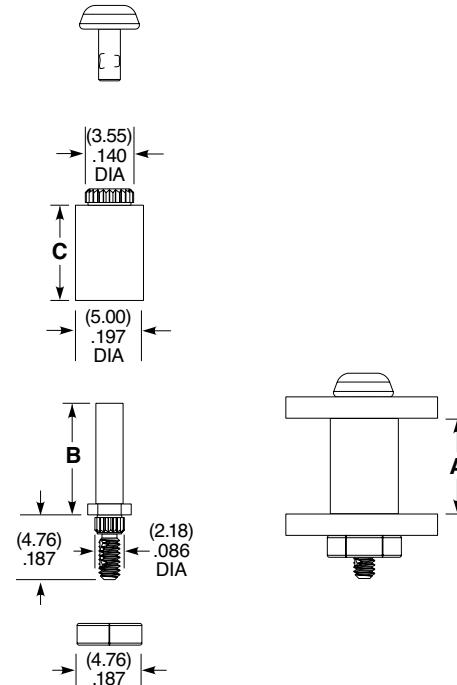

BOARD STACK HEIGHT	A	B	C
-0700	(7.00) .276	(8.20) .323	(7.00) .276
-0900	(9.00) .354	(10.20) .402	(9.00) .354

GPSOM-XXXX-01-01 SHOWN

**Notes:**  
Standoffs to be used with  
(1.57 mm) .062" min thick boards.  
Threaded options PCB max  
thickness of (3.00 mm) .118".

Some sizes, styles and options are  
non-standard, non-returnable.

Components are to be packaged in separate bags unassembled.  
Top and bottom components available for purchase separately, contact Samtec.