



ADASTREA-I EVALUATION BOARD MANUAL

FOR RADIO MODULES

WE order code	Module order code	Marketing name
2615029236001	2615011136000	Adastrea-I

VERSION 1.0

APRIL 19, 2022

MUST READ

Check for firmware updates

Before using the product make sure you use the most recent firmware version, data sheet and user manual. This is especially important for Wireless Connectivity products that were not purchased directly from Würth Elektronik eiSos. A firmware update on these respective products may be required.

We strongly recommend to include in the customer system design, the possibility for a firmware update of the product.

Revision history

Manual version	HW version	Notes	Date
1.0	2.0	Initial version	August 2021

Abbreviations

Abbreviation	Name	Description
EJTAG	Embedded Joint Test Action Group	
EV	Evaluation	
ESD	Electro Static Discharge	
FEM	Front end modem	
FTDI	Future Technology Devices International	
GND	Ground	
GNSS	Global Navigation Satellite System	
HIGH	High signal level	
IO	Input & Output	
LED	Light Emitting Diode	
LOW	Low signal level	
PC	Personal Computer	
PCB	Printed Circuit Board	
RF	Radio frequency	Describes everything relating to the wireless transmission.
THT	Through-hole technology	
UART	Universal Asynchronous Receiver Transmitter	Universal Asynchronous Receiver Transmitter allows communicating with the module of a specific interface.
USB	Universal Serial Bus	
VDD	Voltage Drain Drain	Supply voltage

Contents

1	Supported radio modules	5
2	Functional description	6
2.1	Taking into operation	6
3	Development board	9
3.1	Block diagram	9
3.2	Jumpers	10
3.3	Connectors and pin headers	13
3.3.1	CON1	14
3.3.2	CON2	15
3.3.3	CON3	15
3.3.4	CON4	15
3.3.5	CON5	15
3.3.6	CON6	16
3.3.7	CON7	16
3.3.8	CON8	17
3.3.9	CON9	17
3.3.10	P1	18
3.3.11	P2	18
3.3.12	P3	19
3.3.13	P4	19
3.4	Buttons	20
3.4.1	Reserved - S1	20
3.4.2	Wake-up button - S2	20
3.4.3	Reset button - S3	21
3.5	Function blocks	22
3.5.1	Power supply	22
3.5.1.1	Self powered, power jack	22
3.5.1.2	Bus powered, power supply through USB	22
3.5.2	Current measurement	22
3.5.3	UART / USB	22
3.5.4	UART direct	23
3.5.5	Debugging interface	25
3.6	Schematic	26
3.7	Layout	31
3.8	Bill of material	33
4	Regulatory compliance information	37
4.1	European Conformity	37
4.2	FCC	37
4.3	Exemption clause	37
5	Important notes	38
5.1	General customer responsibility	38
5.2	Customer responsibility related to specific, in particular safety-relevant applications	38
5.3	Best care and attention	38
5.4	Customer support for product specifications	38

5.5	Product improvements	39
5.6	Product life cycle	39
5.7	Property rights	39
5.8	General terms and conditions	39
6	Legal notice	40
6.1	Exclusion of liability	40
6.2	Suitability in customer applications	40
6.3	Trademarks	40
6.4	Usage restriction	40
7	License terms	42
7.1	Limited license	42
7.2	Usage and obligations	42
7.3	Ownership	43
7.4	Firmware update(s)	43
7.5	Disclaimer of warranty	43
7.6	Limitation of liability	43
7.7	Applicable law and jurisdiction	44
7.8	Severability clause	44
7.9	Miscellaneous	44

1 Supported radio modules

The evaluation board described in this manual can be used to evaluate the following products:

Order code	Product name	Description
261501113600	Adastrea-I	LTE-Cat.M1 and NB1-IoT module with GNSS and Integrated MCU

Order code	Product Name
2615029236001	Adastrea-I LTE-Cat.M1 and NB1-IoT EV-kit

Table 1: Compatibility

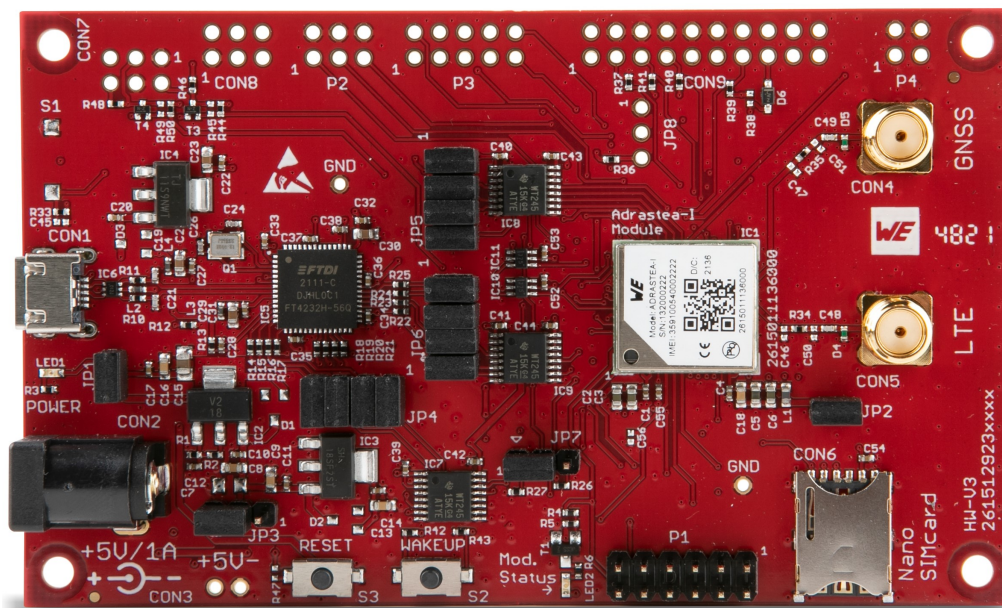


Figure 1: Product image

Kit Content 2615029236001	Quantity
Evaluation board with Adastrea-I	1
LTE dipole antenna	1
GNSS dipole antenna	1
5V/1A plug-in power adapter	1
USB-2.0-Typ-A to USB-2.0-Micro-B cable	1
Packaging: Cardboard Box, ESD safe cover	1

Table 2: Content Thyone-I EV-kit

2 Functional description

The evaluation board offers the user the possibility to develop hard- and software for the compatible radio module. It can be connected to an USB port of a PC.



This evaluation board should be operated with an external power supply or an external powered USB Hub that can provide the peak current of 1A.

For the connection to a micro-controller system, the development board is equipped with a multi-pin connector, which is connected to all pins of the RF module. Jumpers allow the module to be disconnected from components such as the USB interface, which are not required.

Feel free to check our youtube channel:

www.youtube.com/user/WuerthElektronik/videos for video tutorials, hands-ons and webinars relating to our products.

2.1 Taking into operation

- Step 1: To run the evaluation board place the jumpers on default location, as shown in figure 6.
- Step 2: Insert a valid nano sim card for NB-IoT or LTE-M.
(<https://iotcreators.com/wuerth/>)
- Step 3: Install on your PC the corresponding FTDI driver package.
(www.ftdichip.com/Drivers/VCP.htm).
- Step 4: Connect the power jack or external power supply to the EV board and verify that the VDD is stable and able to reliably supply the module's static and peak current consumption, as specified by the module manual.
- Step 5: Connect the evaluation board to the PC using a USB-cable. In that manner, four COM ports can be detected and installed on your PC. Check the device manager to acquire the COM port names of the EV board. A typical name is "COM57" in Windows systems or /dev/ttyUSB0 in Linux systems.
Note that usually the four COM ports are assigned in ascending order, as shown in figure 2.
- Step 6: To interact with the module, it is advised to use the *Adrastea Command tool*. Otherwise, a terminal program (like putty for Windows) has to be run, and the corresponding COM port has to be opened using the default settings of the mounted radio module.
- Step 7: Press the reset button to ensure a clean start-up of the module. See figure 3.
- Step 8: Check if the SIMcard is detected. Send command `map` followed by the command `AT+CPIN?`. See figure 4.



"map" command is required before sending AT commands to the modem

Please refer to the module user manual to get the detailed module's specific quick start instructions.

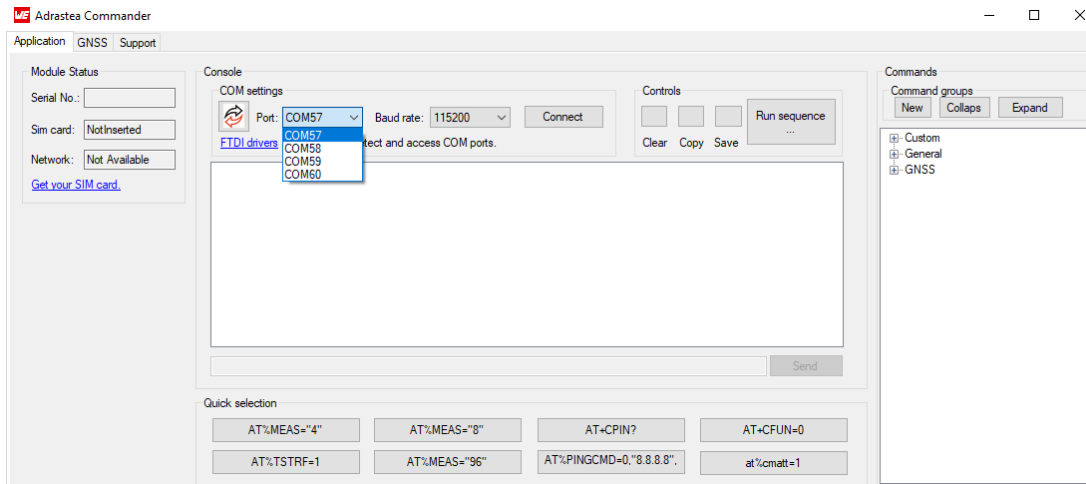


Figure 2: 4 COM ports detected - Adrastea command

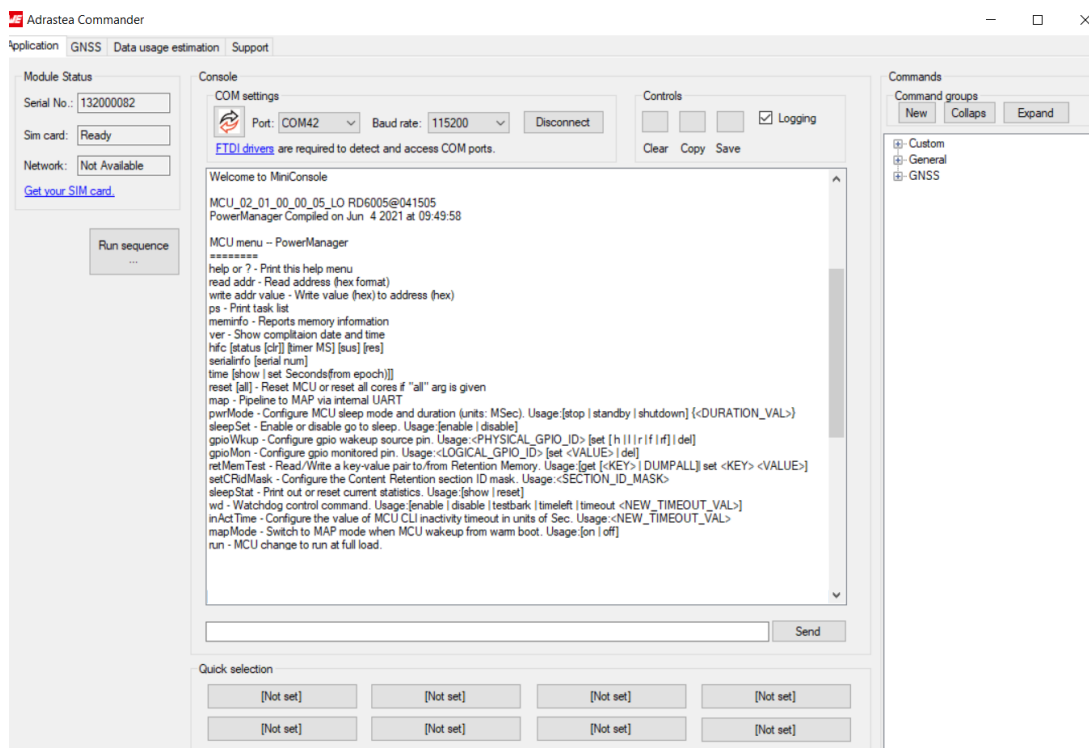


Figure 3: MiniConsole start view- Adrastea command

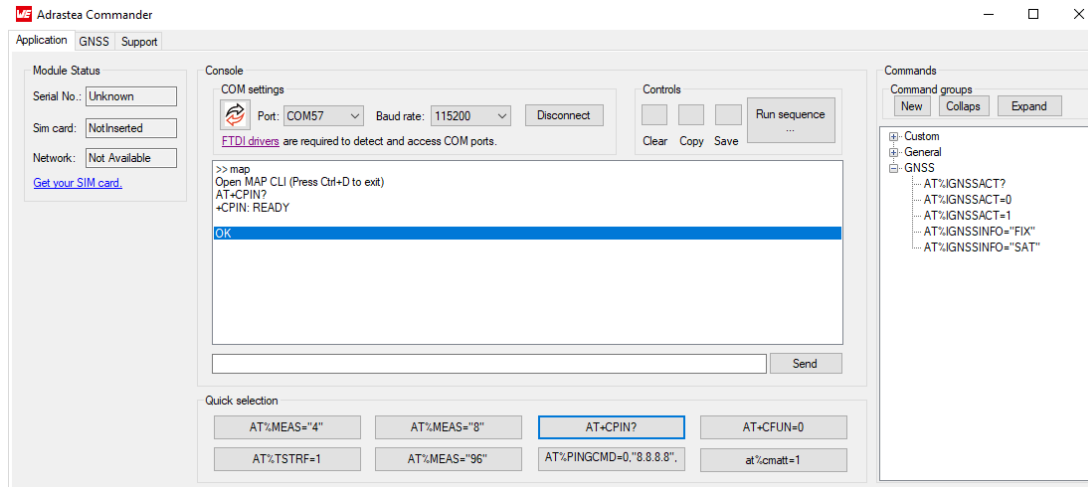


Figure 4: SIM card detected- Adrastea command

3 Development board

3.1 Block diagram

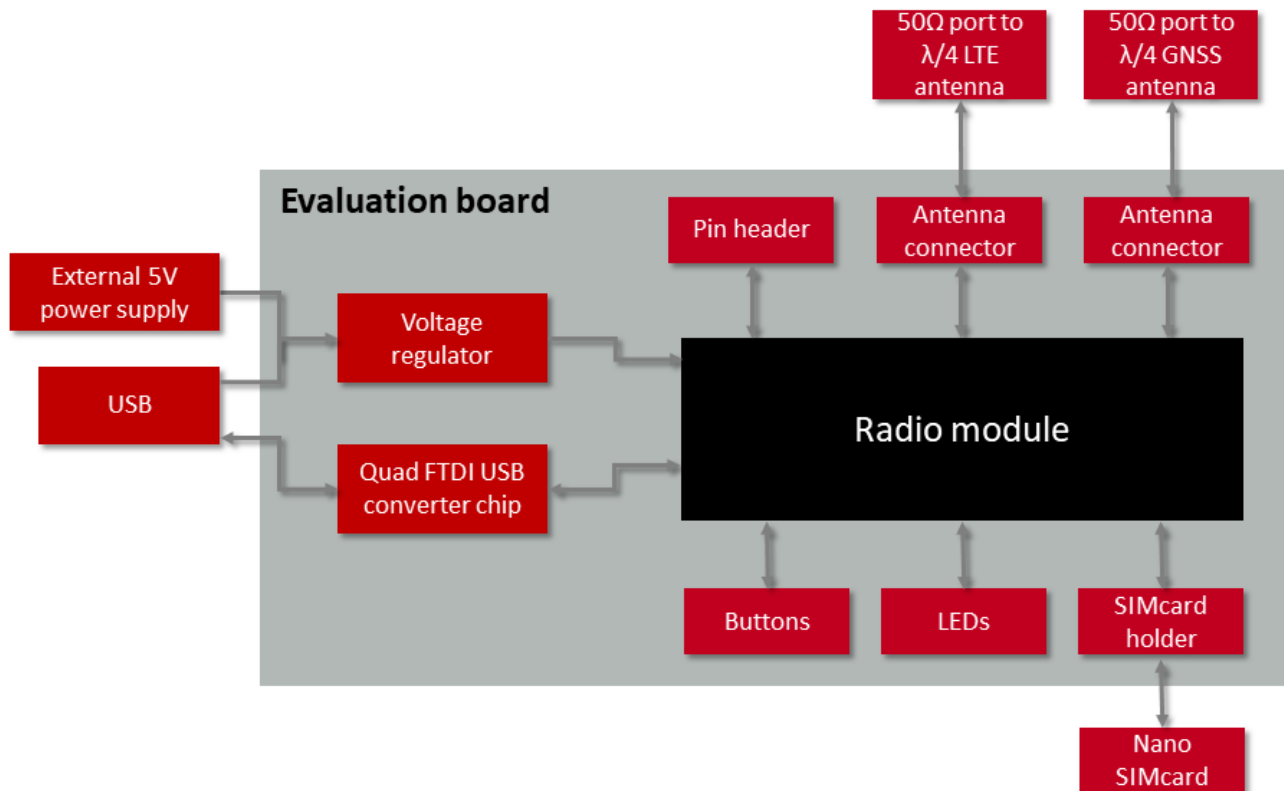


Figure 5: Block diagram

3.2 Jumpers

The following figure shows the default positioning (marked in red) of all jumpers on the EV board. This section also contains the details to any jumper connection that is supported by the EV board.

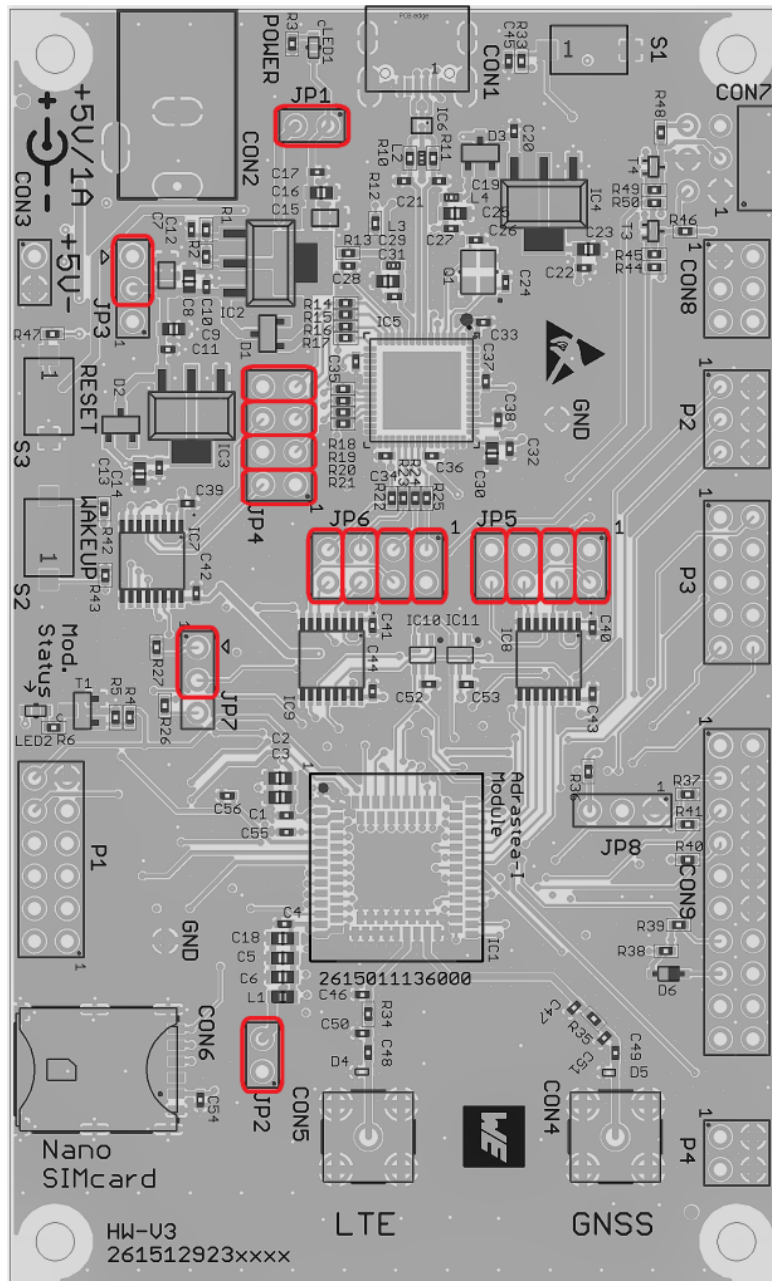


Figure 6: Jumpers, default

JP1	Function	Jumper set (default)
1,2	Power bridge. Remove for measuring the complete current flowing into the module	Yes

Table 3: Jumper JP1

JP2	Function	Jumper set (default)
1,2	Power bridge FEM. Remove for only measuring the current flowing into the FEM	Yes

Table 4: Jumper JP2



Current measured in JP1 includes the FEM current.

JP3	Function	Jumper set (default)
1,2	Board supplied via USB	No
2,3	Board supplied via Plug-in power adapter	Yes

Table 5: JP3 input power selection

JP4	Function	Jumper set (default)
1,2	FTDI /CTS - Module's UART /RTS	Yes
3,4	FTDI /RTS - Module's UART /CTS	Yes
5,6	FTDI Rx - Module's Tx UART	Yes
7,8	FTDI Tx - Module's Rx UART	Yes

Table 6: JP4 UART0 to USB communication - Miniconsole

JP5	Function	Jumper set (default)
1,2	FTDI /CTS - Module's UART /RTS	Yes
3,4	FTDI /RTS - Module's UART /CTS	Yes
5,6	FTDI Rx - Module's Tx UART	Yes
7,8	FTDI Tx - Module's Rx UART	Yes

Table 7: JP5 UART1 to USB communication - Console logs

JP6	Function	Jumper set (default)
1,2	FTDI /CTS - Module's UART /RTS	Yes
3,4	FTDI /RTS - Module's UART /CTS	Yes
5,6	FTDI Rx - Module's Tx UART	Yes
7,8	FTDI Tx - Module's Rx UART	Yes

Table 8: JP6 UART2 to USB communication - FW update



Logic level on JP4, JP5 and JP6 is 3.3V.

Inbetween the radio module and the jumpers, level shifters are included for signal level compatibility with the FTDI Chip.

JP7	Function	Jumper set (default)
1,2	I/O of level shifter enable	Yes
2,3	I/O of level shifter set to high impedance	No

Table 9: JP7 Isolation control of level shifter

In case of measuring the current flowing into the module in deep hibernate mode (DH0, DH1 and DH2), the jumper link shall be set in the position 2,3. Notice that in this position, no UART communication is possible, therefore, the jumper shall be placed back in the position 1,2 to be able to communicate with the module via UART.

JP8	Function	Jumper set (default)
1,2	Reserved	No
2,3	Debugging microcontroller	No

Table 10: JP8 debugging selector (not mounted)

3.3 Connectors and pin headers

This section explains all connectors and pin headers on the EV board.

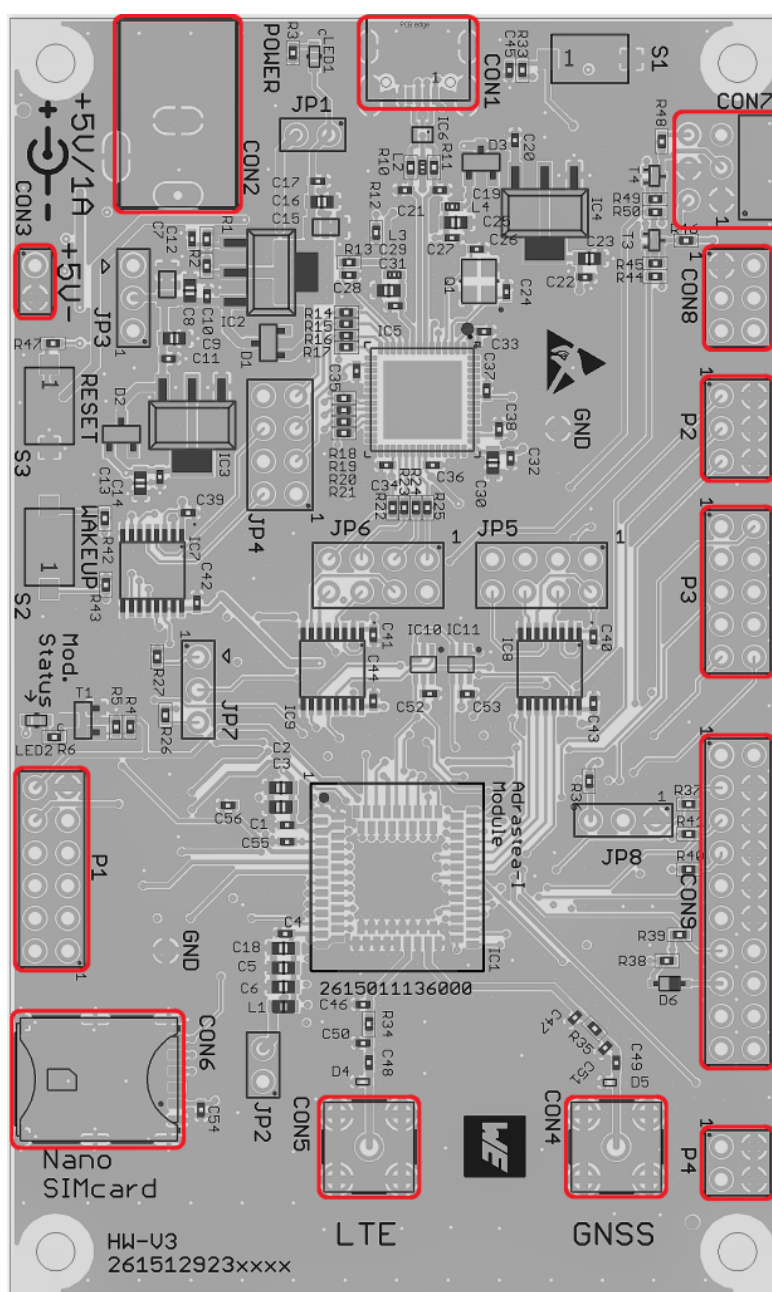


Figure 7: Connectors and pin headers

The table 11 lists connectors and pin header assembled by default on the evaluation board.

Pin header	Function	WE article number
CON1	Micro-USB connector for host connection and VDD bus supply	629105150521
CON2	Plug-in power jack	694106301002
CON4	GNSS RF signal	60312002114503
CON5	LTE RF signal	60312002114503
CON6	SIMcard connection	693043020611
P1	Direct access to signals of the radio module	61301221121

Table 11: Default assembled connectors and pin headers

Additionally, the following connectors can be assembled, if needed.

Pin header	Function	WE article number
CON3	External power supply	61300211121
CON7	I ² C interface	613006243121
CON8	SPI interface	61300621821
CON9	EJTAG debug	61302021121
P2	Direct access to signals of the radio module	61300621121
P3	Direct access to signals of the radio module	61301021121
P4	ADC interface	61300421121

Table 12: Optional connectors



CON7 and CON8 suits to connect *WSEN-EVAL* by mounting the corresponding headers.

3.3.1 CON1

Connector CON1 is a micro-USB connector that enables connection to PC via standard micro-USB cable.

CON1	Function
-	Micro-USB connector for host connection and VDD bus supply

Table 13: Micro-USB connector

3.3.2 CON2

Connector CON2 is a power jack right angled connector that can be used to provide the main power to the board.

CON2	Function
-	Power jack, External 5V/1A power supply

Table 14: Power jack

3.3.3 CON3

Connector CON3 can be used to provide the main power to the board using an external power supply. This connector is not populated by default.

CON3	Function
1	+5 V
2	GND

Table 15: External power connection

3.3.4 CON4

Connector CON4 (SMA receptacle) is used to connect the GNSS antenna.

CON4	Function
Inner	RF signal
Outer	GND

Table 16: SMA connector for GNSS



Optional: The antenna is matched with the marked components. Following this reference design, it served experts for filtering and fine tuning.

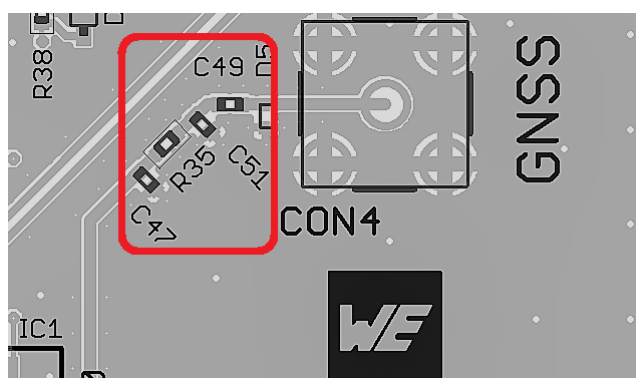


Figure 8: Matching filter for GNSS transmission line

3.3.5 CON5

Connector CON5 (SMA receptacle) is used to connect the LTE antenna.

CON5	Function
Inner	RF signal
Outer	GND

Table 17: SMA connector for LTE



Optional: The antenna is matched with the marked components. Depending on the exact application and band of operation experts may use the placeholder (C46, C50 and R34) for additional filtering and tuning.

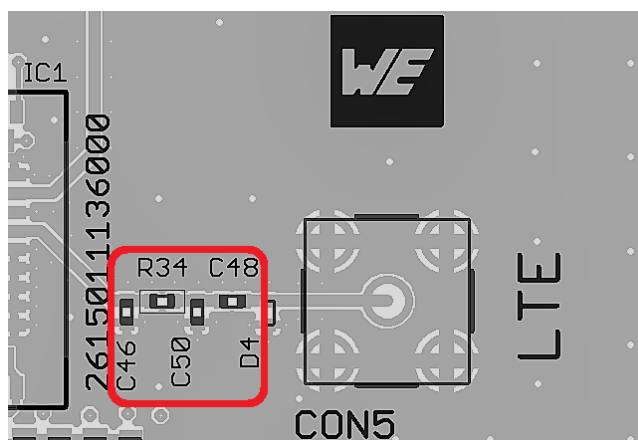


Figure 9: Matching filter for GNSS transmission line

3.3.6 CON6

Connector CON6 is a push/pull nano SIMcard holder.

CON6	Function
C1	Voltage supply for SIMcard
C2	SIMcard reset signal
C3	SIMcard clock signal
C5	SIMcard GND
C6	Not connected
C7	SIMcard data signal

Table 18: Nano SIMcard holder

3.3.7 CON7

Connector CON7 can be used to connect the WE Sensor evaluation boards via I²C interface. This feature is subjected to a customized firmware and not supported by default firmware.

CON7	Module pin	Function
1	-	GND
2	I2C0_SCL/GPIO43	Clock signal
3	I2C0_SDA/GPIO42	Data signal
4	-	GND
5	-	Not connected
6	-	+1.8 V

Table 19: 2x3 right angle socket



This EV board includes pull-up resistors (equivalent 500 Ohm aprox.) in I²C bus.

3.3.8 CON8

Connector CON8 can be to connect the WE Sensor evaluation boards via SPI interface. This feature is subjected to a customized firmware and not supported by default firmware.

CON8	Module pin	Function
1	-	GND
2	SPIM1_CLK/GPIO41	Clock signal
3	SPIM1_MOSI/GPIO38	MOSI signal
4	SPIM1_EN/GPIO40	Enable signal
5	SPIM1_MISO/GPIO39	MISO signal
6	-	+1.8 V

Table 20: 2x3 socket

3.3.9 CON9

Connector CON9 is the EJTAG debugging interface.

CON9	Module pin	Function
1	VDDIO	+1.8 reference output voltage
3	EJ_TRST	JTAG reset
5	EJ_TDI	JTAG data input
7	EJ_TMS	JTAG mode select
9	EJ_TCK	JTAG clock
13	EJ_TDO	JTAG data output
15	DEBUG_ /RST	Reset pin for the JTAG probe
4,6,8,10,12	-	GND
2,11,14,16,17,18,19,20	-	Not Connected

Table 21: 2x10 EJTAG connector

3.3.10 P1

P1	Module pin	Function
1	RESERVED (70)	Reserved pin
2	EXT_ALARM	Additional module's status indicator
3	AT_OUT	Antitamper output pin
4	AT_IN	Antitamper input pin
5	RESERVED (11)	Reserved pin
6	RESERVED (64)	Reserved pin
7	VCAP	Temporal power supply input for battery replacement
8	VBACKUP	Temporal power supply input for battery replacement
9	/RESET	Hardware reset
10	WAKEUP	Full power enable
11	GND	Ground
12	STATUS	Module's status indicator

Table 22: Pin header P1

On P1 non categorized module pins are available.

3.3.11 P2

P2	Module pin	Function
1	RESERVED (67)	Reserved pin
2	RESERVED (62)	Reserved pin
3	RESERVED (69)	Reserved pin
2,4,6	-	GND

Table 23: Pin header P2



Reserved pins are restricted for internal use.

3.3.12 P3

P3	Module pin	Function
1	RESERVED (73)	Reserved pin
2	RESERVED (66)	Reserved pin
3	RESERVED (68)	Reserved pin
4	RESERVED (71)	Reserved pin
5	RESERVED (44)	Reserved pin
6	RESERVED (47)	Reserved pin
7	RESERVED (89)	Reserved pin
8	RESERVED (49)	Reserved pin
9	RESERVED (78)	Reserved pin
10	RESERVED (54)	Reserved pin

Table 24: Pin header P3



Reserved pins are restricted for internal use.

3.3.13 P4

P4	Module pin	Function
1	ADC0/GPIO1	Analog to digital converter channel 0
3	ADC1/GPIO2	Analog to digital converter channel 1
2,4	-	GND

Table 25: Pin header P4

3.4 Buttons

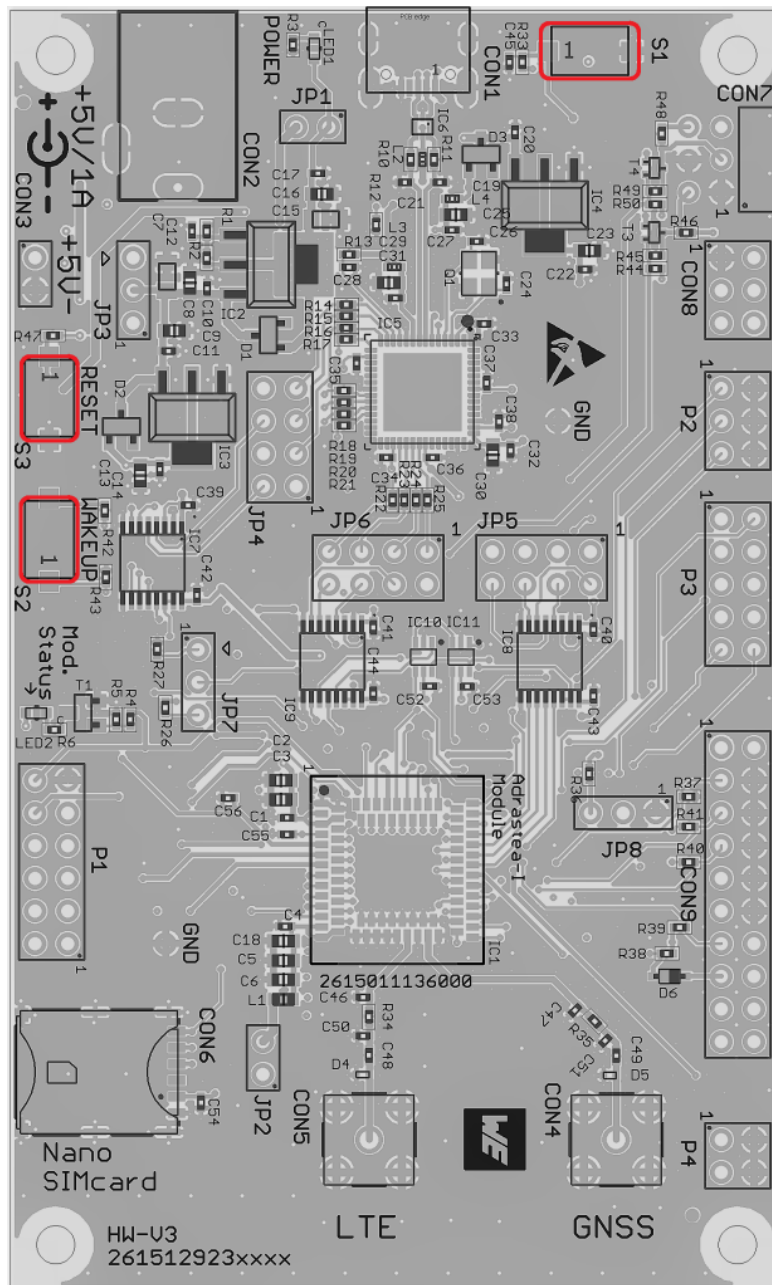


Figure 10: Connectors and pin headers

3.4.1 Reserved - S1

The functionality of this button is reserved for future use.

3.4.2 Wake-up button - S2

This button drives *WAKEUP* pin. When the wake-up button is pushed, it pulls up the *WAKEUP* pin to allow the module to get out from sleep mode. After pushing the S2, the command `sleepSet disable` should be sent to indefinitely wake-up the module. If this command is not received, the module goes back to the sleep state.

If S2 is not pushed, it enables the module to get into sleep mode.

3.4.3 Reset button - S3

This button starts a power down cycle, which leads to a hardware reset of the module. Please refer to the module specific manual for detailed information.

3.5 Function blocks

3.5.1 Power supply

3.5.1.1 Self powered, power jack

Make sure JP3 is in default position (2-3) and JP1 and JP2 jumper are put on.

The USB for communication must be connected only after the Power jack was connected and VCC is stable.

The development board can be powered via 5V Power Jack. The integrated voltage regulator regulates the connected voltage 5V down to 3.6 V and supplies the remaining parts of the circuit. If the evaluation board is power sourced, the power LED1 lights up.



It is recommended to use the power adapter included in the evaluation kit (or equivalent) for supplying power to avoid damage of the USB interface, when pulling high transmission currents.

3.5.1.2 Bus powered, power supply through USB

The radio module may be powered via USB connector (requires the JP3 to be placed at 1-2). As the maximum current of the board might exceed the "Max Bus Power" configured in the FTDI IC, this method is not recommended to be used as it may damage the connected PC permanently.

3.5.2 Current measurement

By default, JP3 is bridged for normal operation. If a current meter is connected in place of the jumper, the power consumption of the radio module can be measured.

Likewise, the current consumption of the FEM in module can be measured separately at JP2.

If the meter is not attached and the bridge is not set, the module will not receive a supply voltage. However, the power LED1 may be active, as it is connected prior to the current measurement bridge in order not to distort the module's power consumption.

3.5.3 UART / USB

The UART of the module can be connected to the USB converter by setting the bridge to JP2 and is available on the USB jack so that the module can be connected directly to a PC. Using the FTDI-driver the PC will show four virtual COM-Ports (see Figure 2. Normally, the PC assigns the COM-PORT number in ascending order, which respectively corresponds to the UART0, UART1 and UART2. The following table shows an example of possible assignment of COM-PORTs.

COM-Port number	UART	Function
COM57	UART0	Miniconsole
COM58	UART1	Console logs
COM59	UART2	FW update
COM60	not used	-

Table 26: COM-PORT to UART assigment



The USB cable length must not exceed 3 meters.

3.5.4 UART direct

If a micro-controller is to be connected to the module, remove the bridge on JP4, JP5 and/or JP6. The UART can be connected directly on the pin strips (all even numbered pins) as shown bellow.

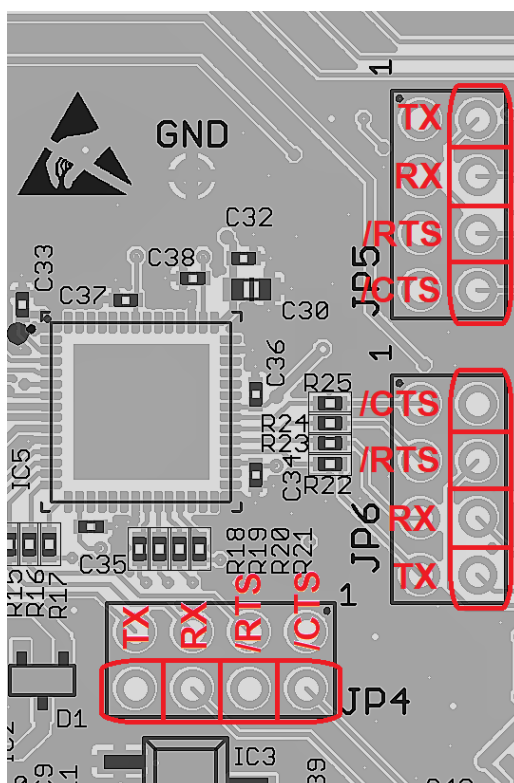


Figure 11: UART Interface

The UARTs connection to host micro-controller should be as follow:

UART interface in EV Board	Host micro-controller	Voltage level
TX	TX	3.3 V
RX	RX	3.3 V
/CTS	/CTS	3.3 V
/RTS	/RTS	3.3 V

Table 27: COM-PORT to UART assignment



In the EV board the UART signals are level shifted from 1.8 V to 3.3 V and correspondingly cross-coupled as shown below.

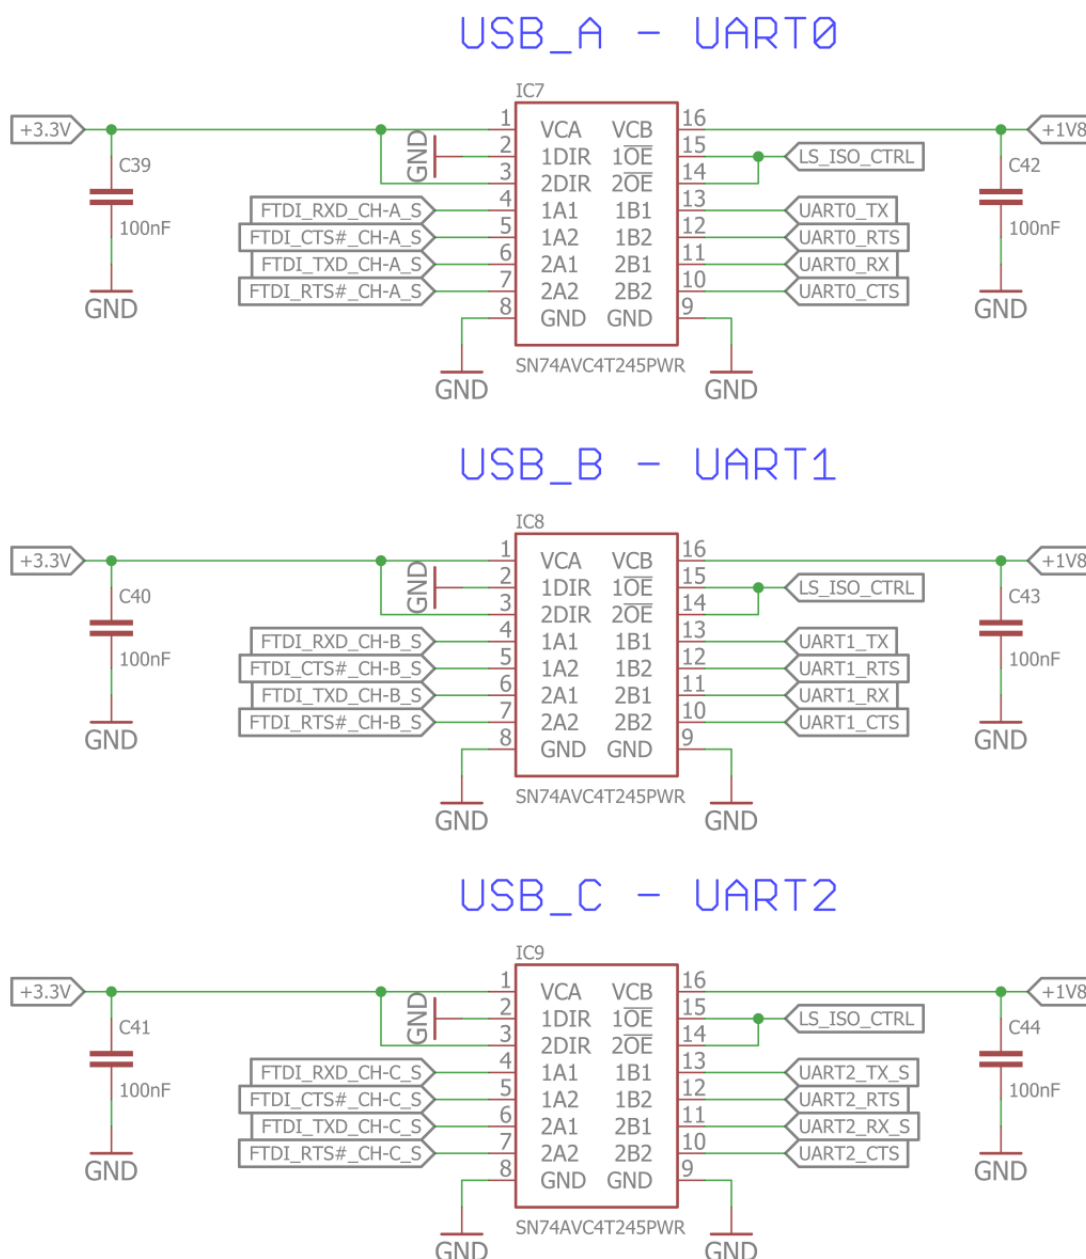


Figure 12: Signal crossing and level shifting of the UART signals

3.5.5 Debugging interface

The evaluation board provides a 2*10 pin connector to debug the internal micro-controller via EJTAG. Please take care of the correct mounting of the debugging adapter (Pin 1 is marked as such). Depending on the used debugger an additional adapter may be required.

The recommended debugger adapter is Segger J-Link plus.

To debug it is necessary to assemble JP8 and bridge pins 2-3.

3.6 Schematic

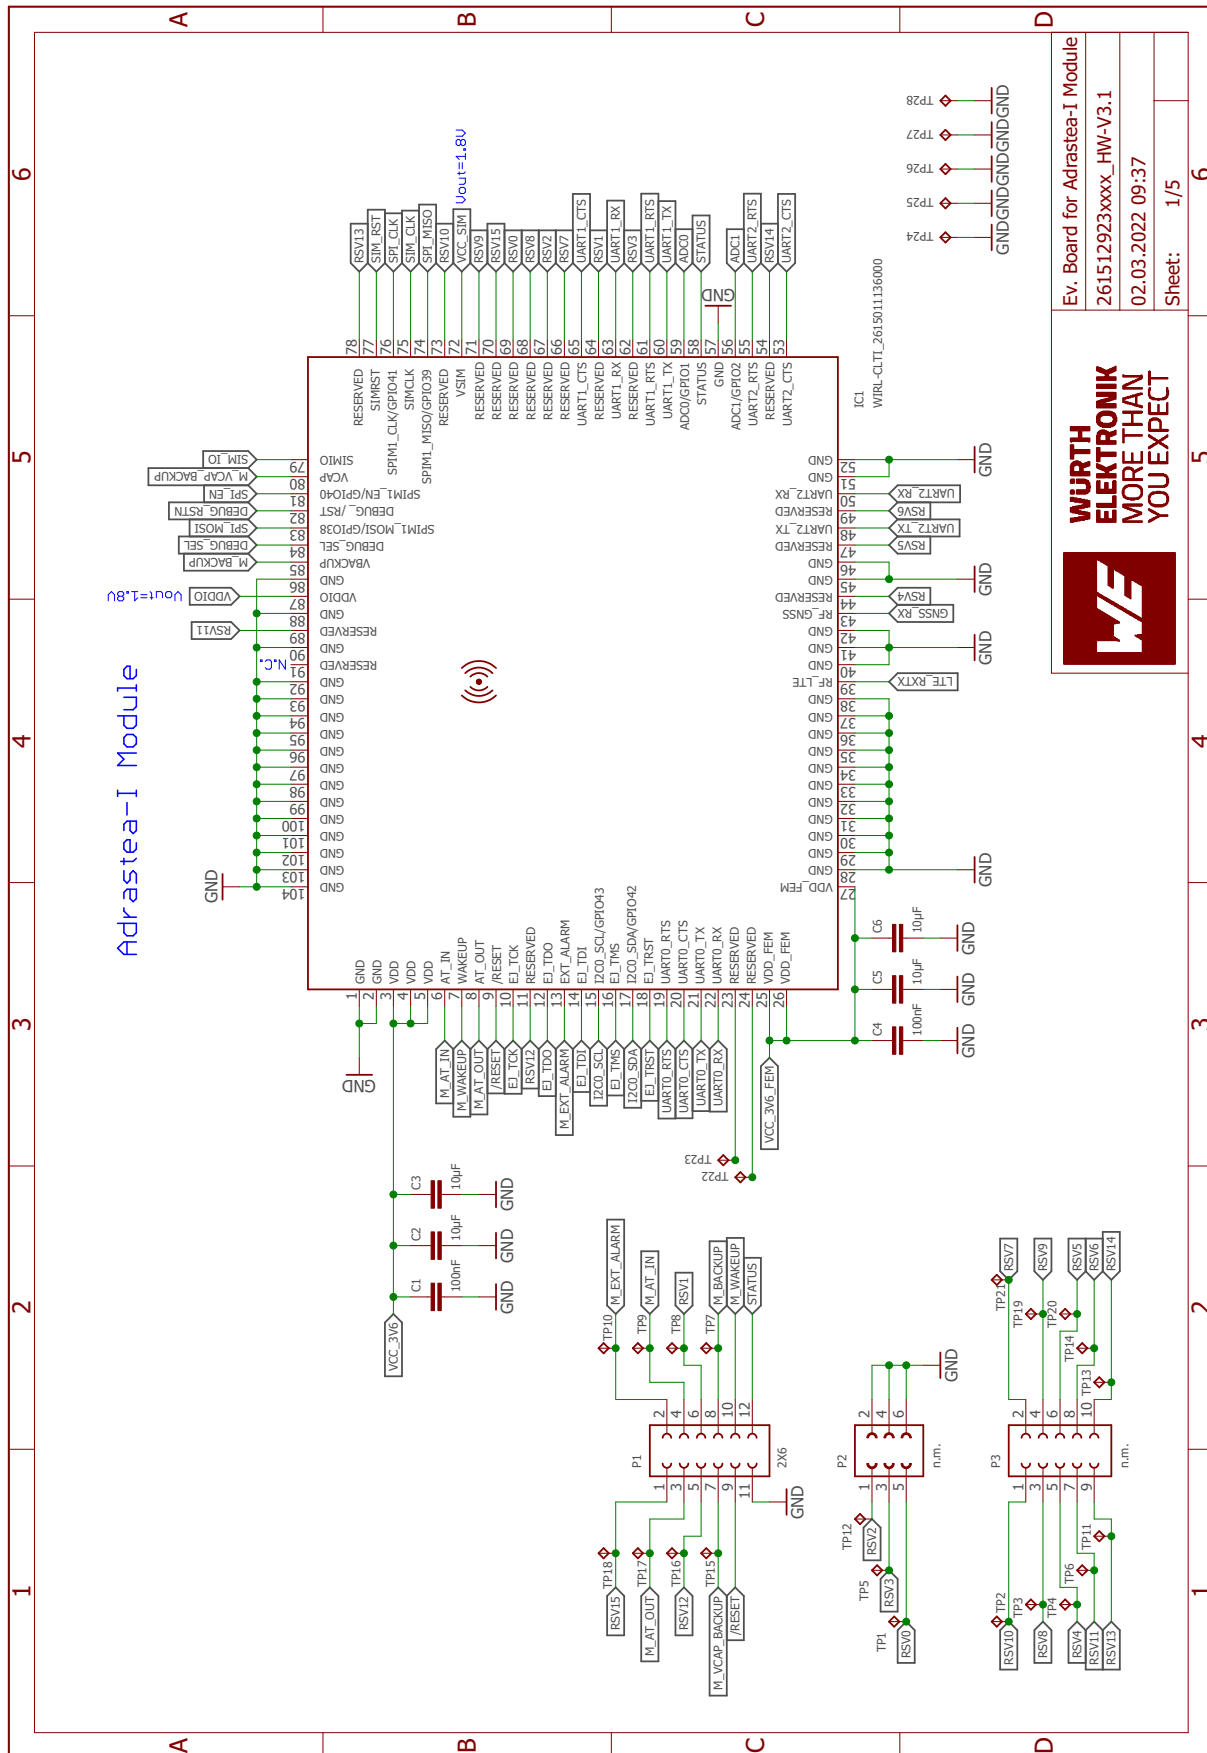


Figure 13: Circuit diagram 1

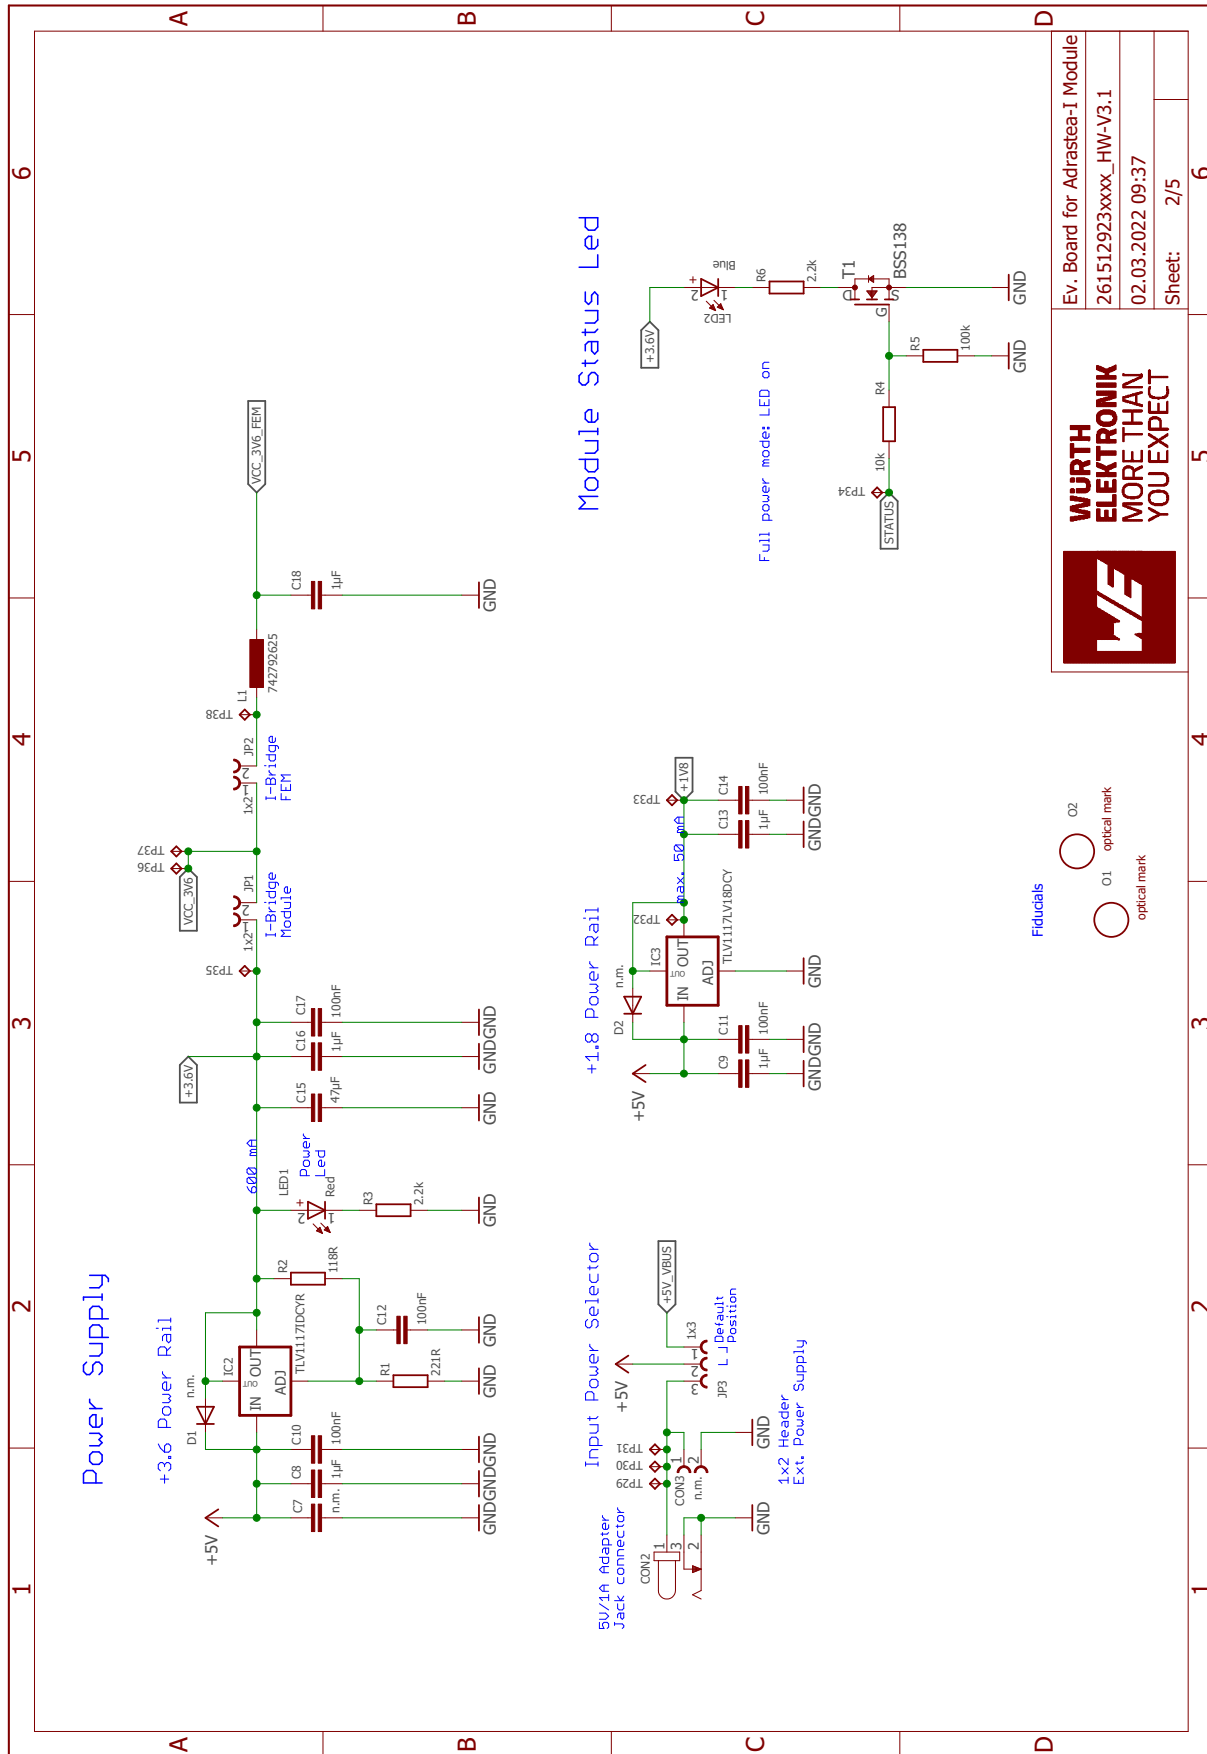


Figure 14: Circuit diagram 2

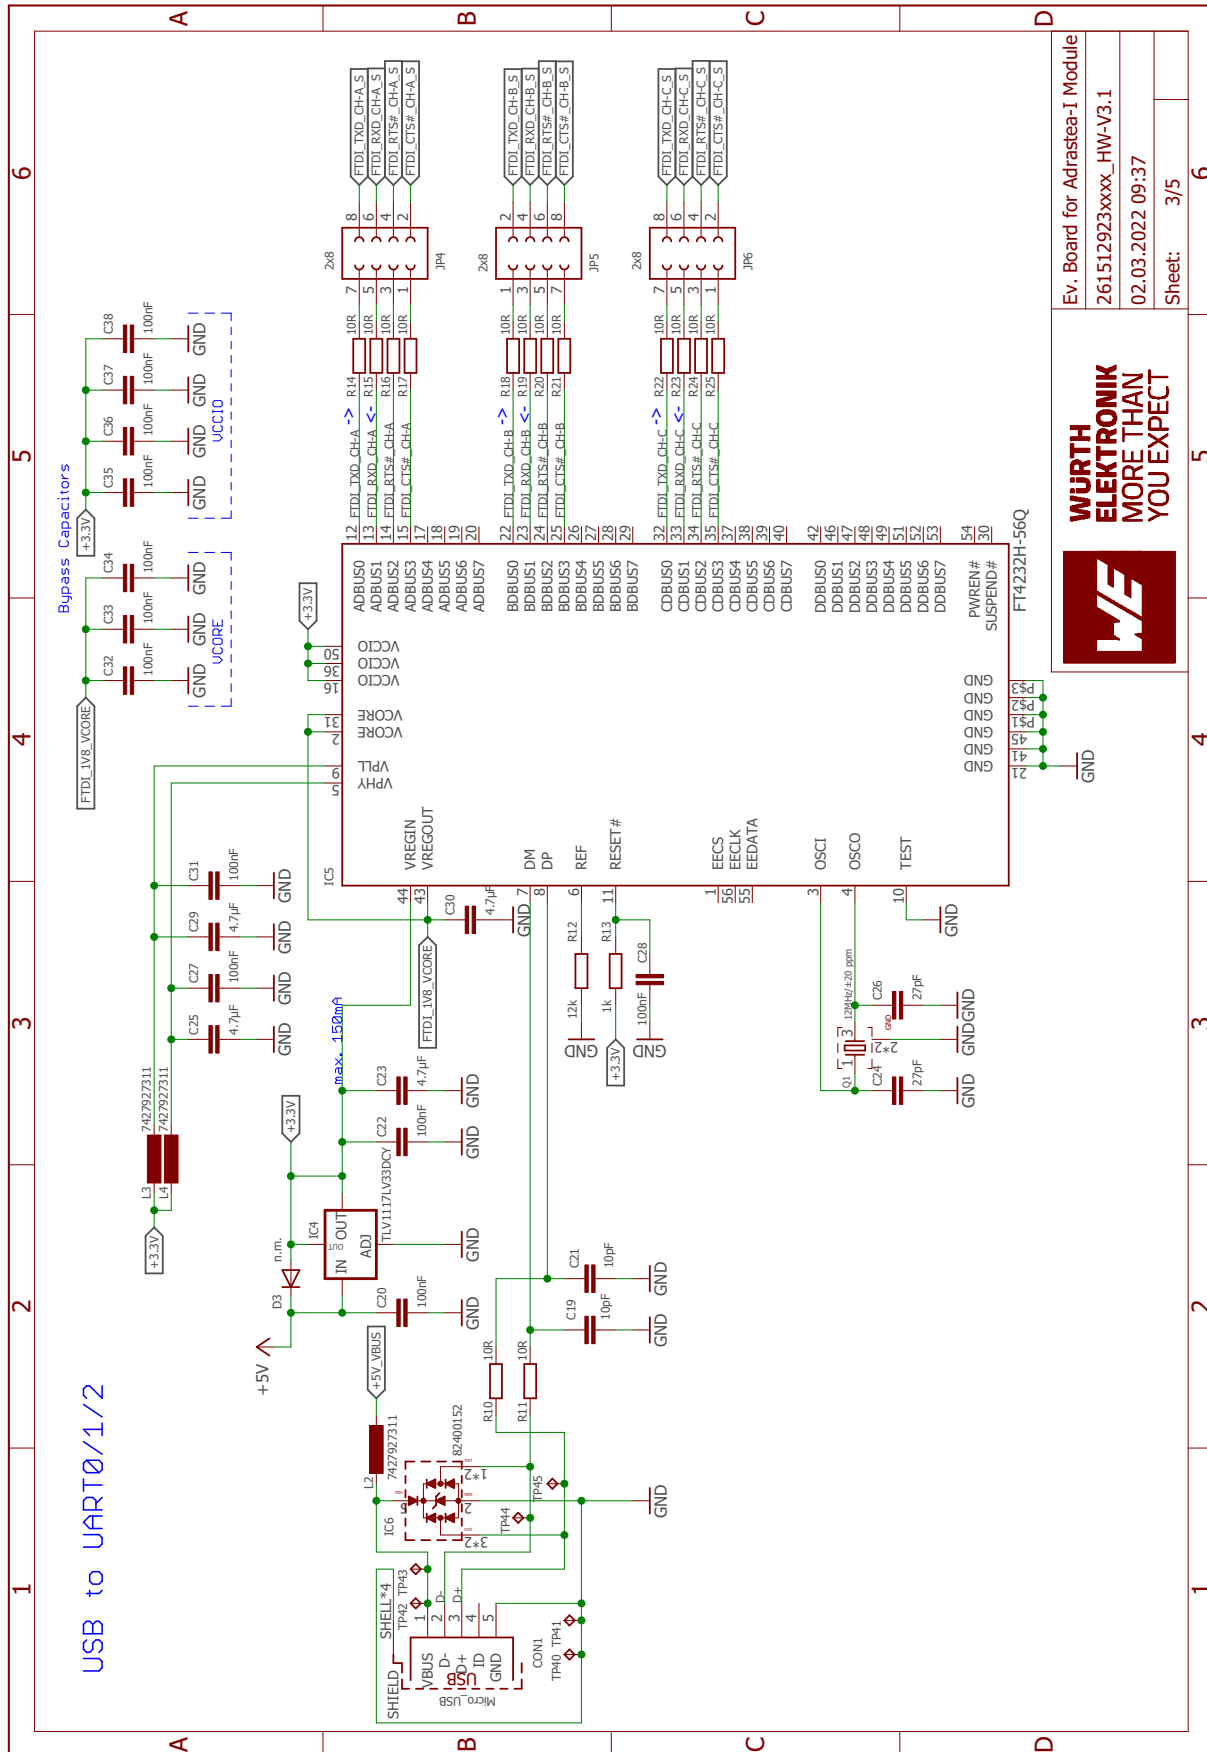


Figure 15: Circuit diagram 3

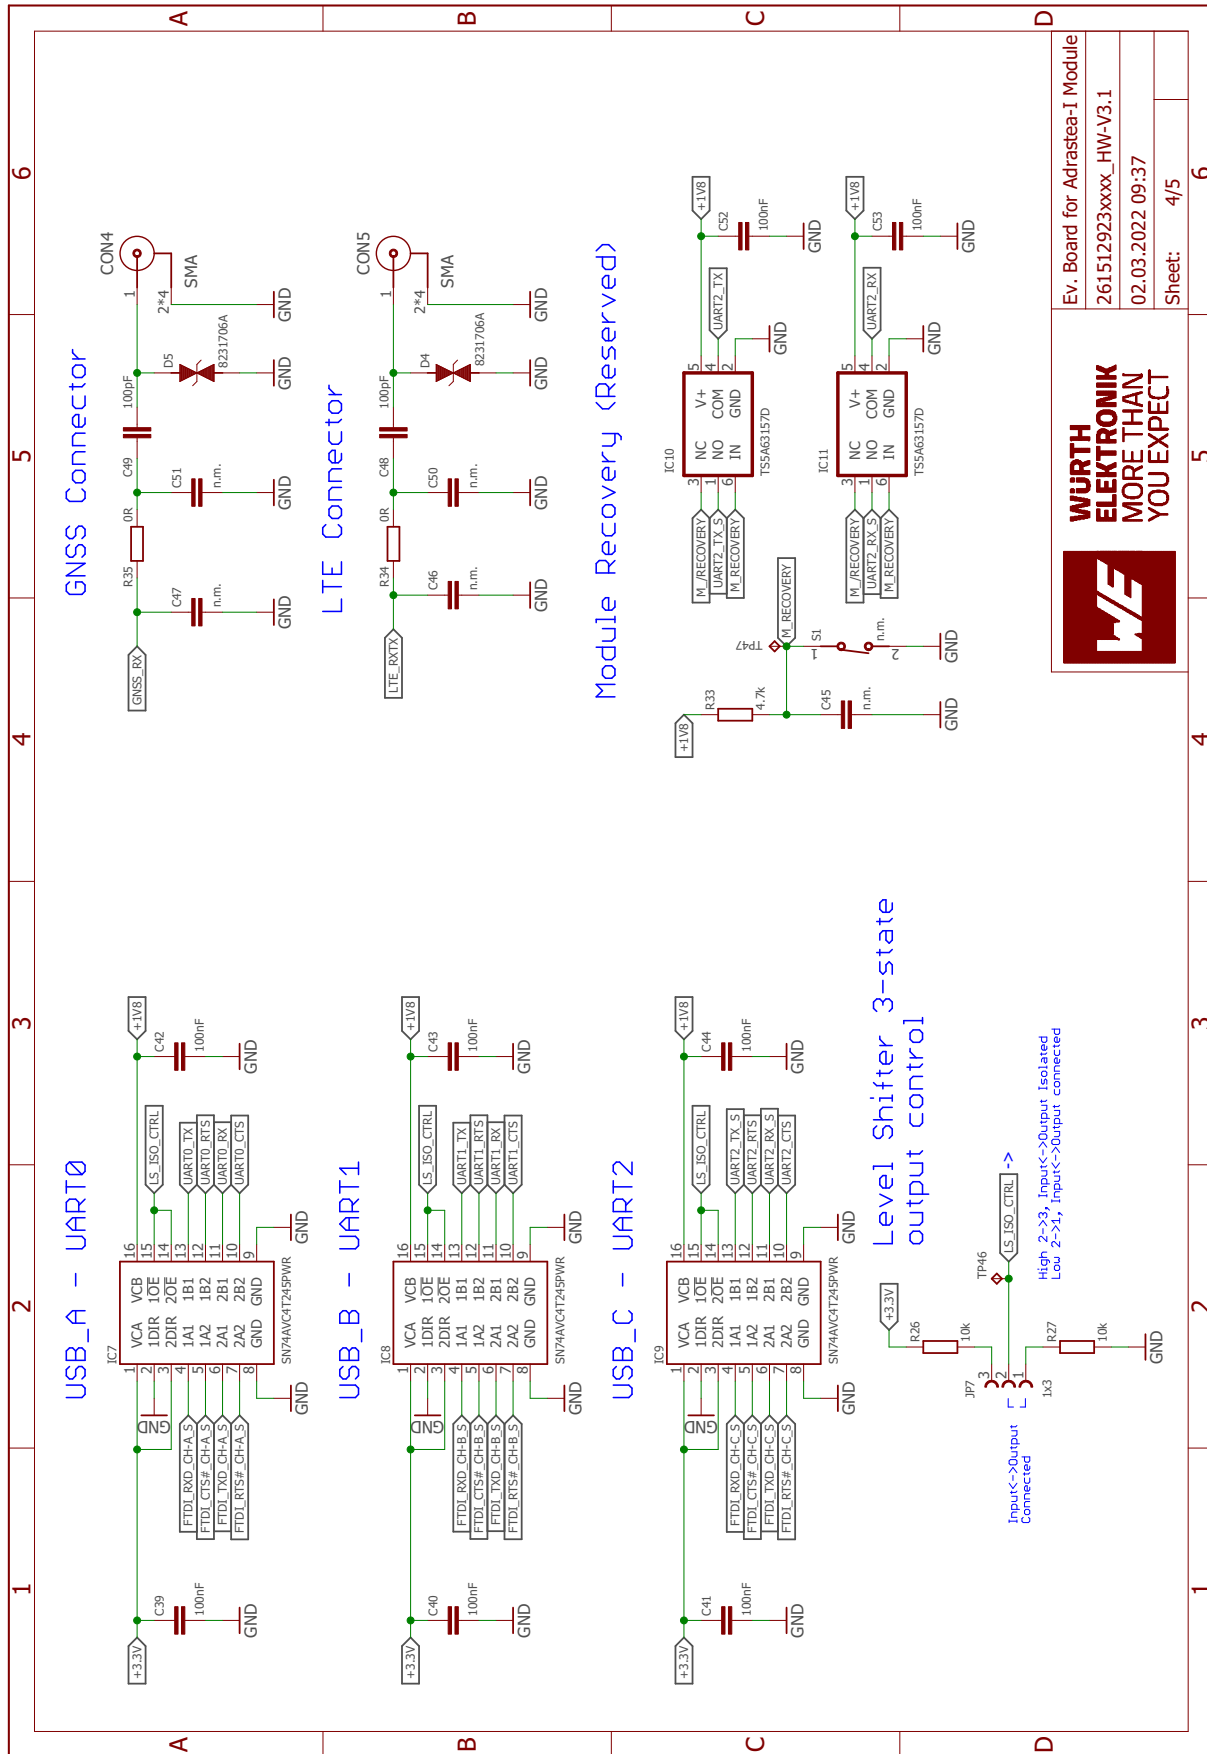


Figure 16: Circuit diagram 4

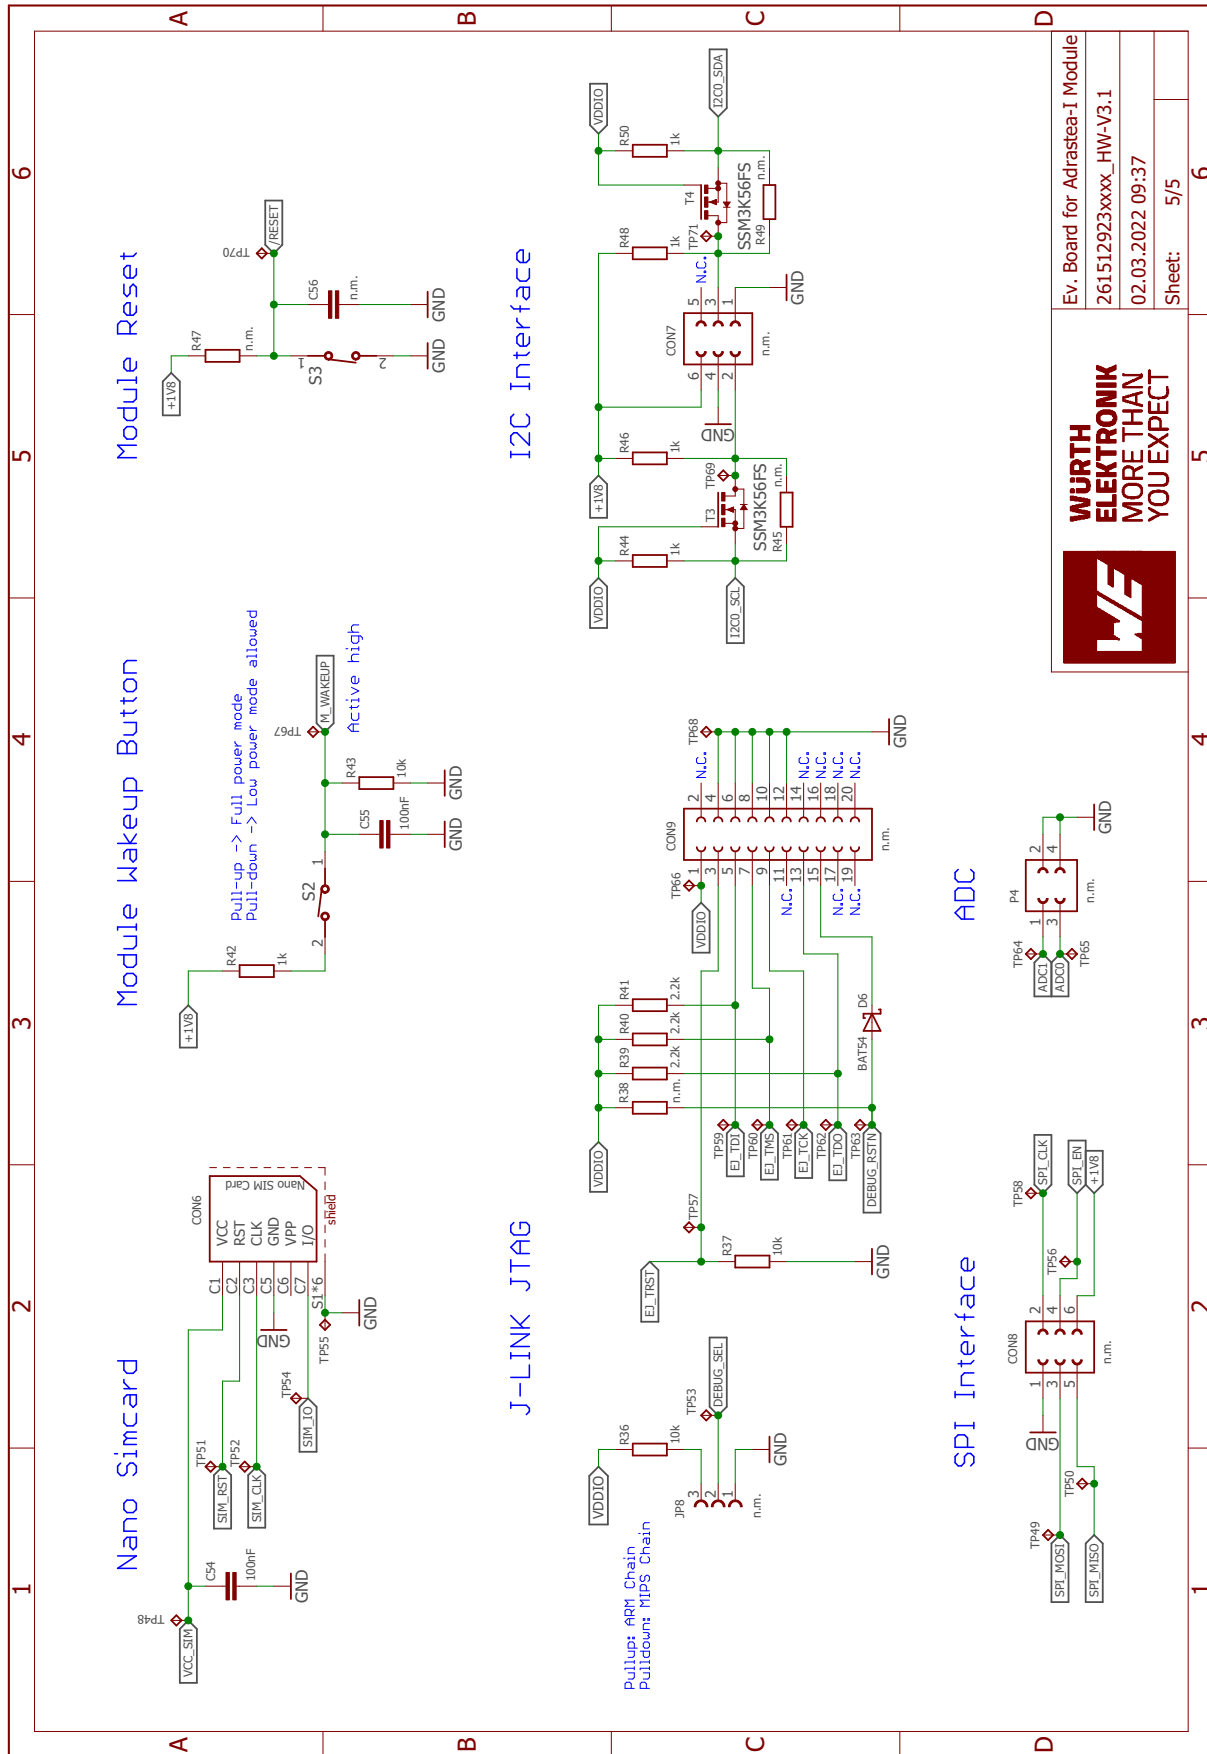


Figure 17: Circuit diagram 5

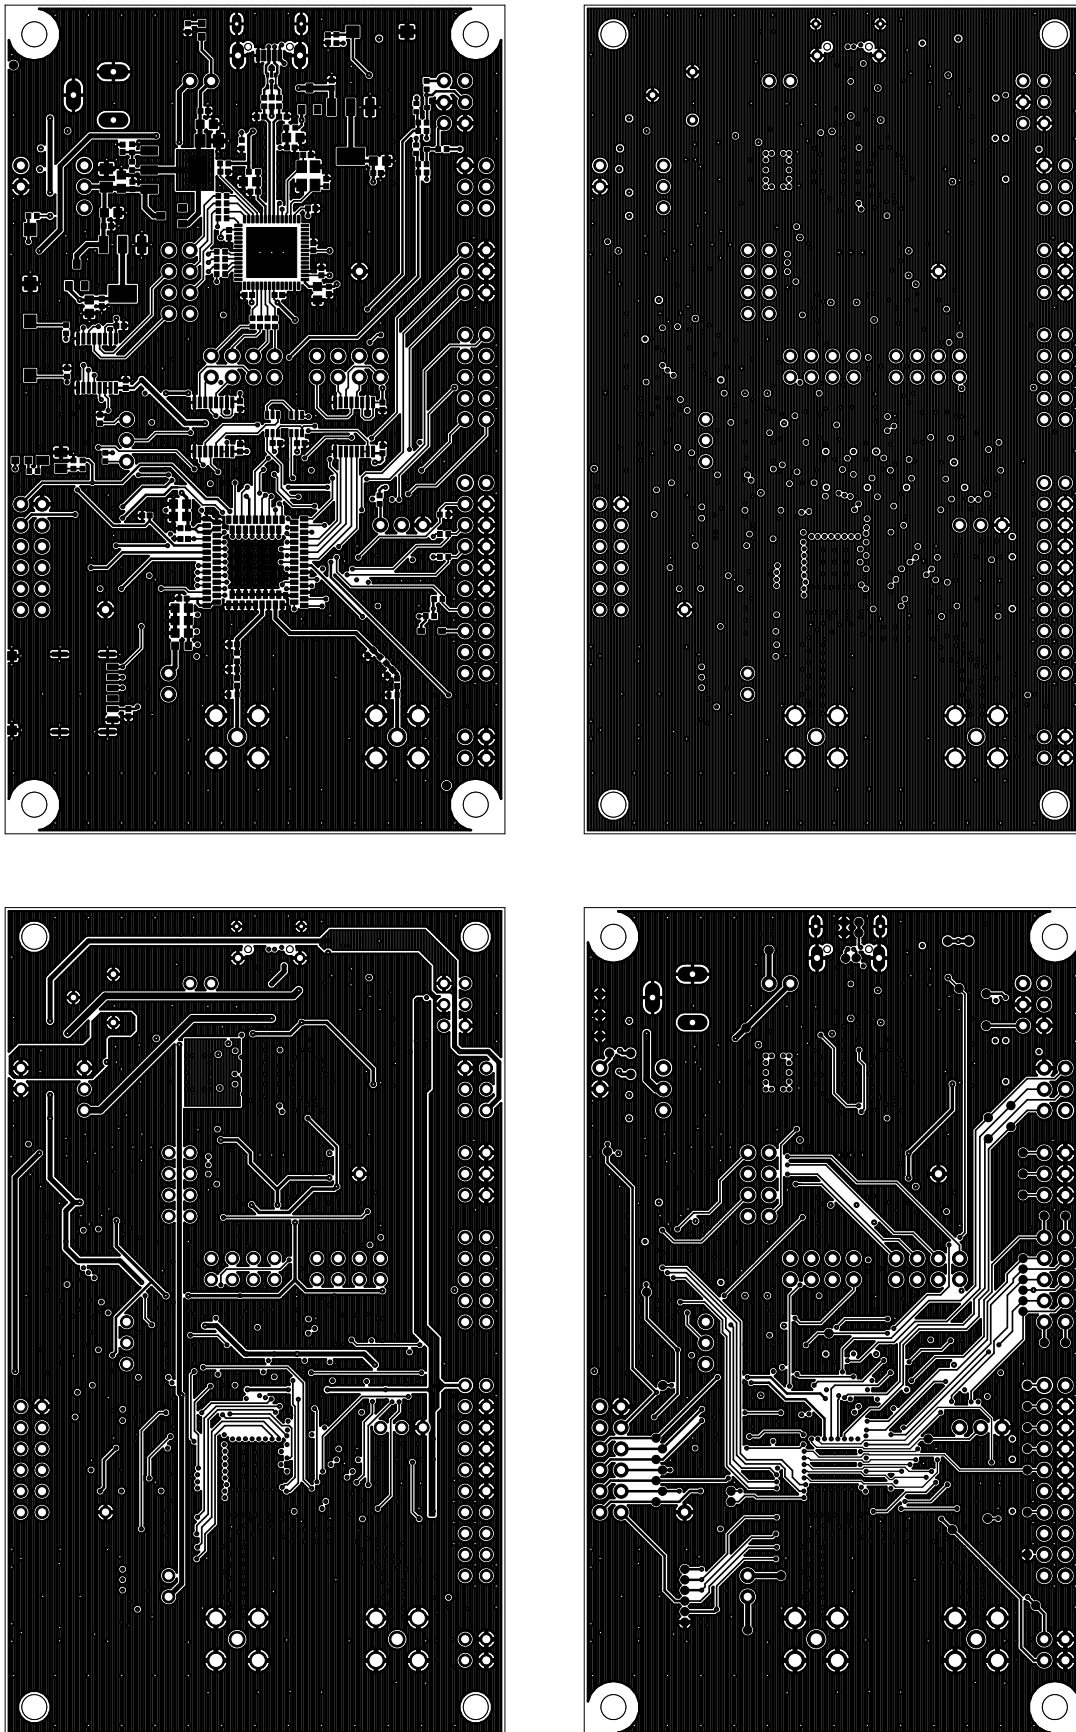


Figure 19: Top layer (upper left), second layer (upper right), third layer (bottom left), fourth layer (bottom right)

3.8 Bill of material

Part	Value	Pack	Manufacturer	NR
C1	100nF	0402	Würth Elektronik eiSos	885012205037
C2	10uF	0603	Würth Elektronik eiSos	885012106006
C3	10uF	0603	Würth Elektronik eiSos	885012106006
C4	100nF	0402	Würth Elektronik eiSos	885012205037
C5	10uF	0603	Würth Elektronik eiSos	885012106006
C6	10uF	0603	Würth Elektronik eiSos	885012106006
C7	n.m.	0805	n.m.	n.m.
C8	1uF	0603	Würth Elektronik eiSos	885012206076
C9	1uF	0603	Würth Elektronik eiSos	885012206076
C10	100nF	0402	Würth Elektronik eiSos	885012205037
C11	100nF	0402	Würth Elektronik eiSos	885012205037
C12	100nF	0402	Würth Elektronik eiSos	885012205037
C13	1uF	0603	Würth Elektronik eiSos	885012206076
C14	100nF	0402	Würth Elektronik eiSos	885012205037
C15	47uF	0805	Würth Elektronik eiSos	885012107006
C16	1uF	0603	Würth Elektronik eiSos	885012206076
C17	100nF	0402	Würth Elektronik eiSos	885012205037
C18	1uF	0603	Würth Elektronik eiSos	885012206076
C19	10pF	0402	Würth Elektronik eiSos	885012005055
C20	100nF	0402	Würth Elektronik eiSos	885012205037
C21	10pF	0402	Würth Elektronik eiSos	885012005055
C22	100nF	0402	Würth Elektronik eiSos	885012205037
C23	4,7uF	0603	Würth Elektronik eiSos	885012106005
C24	27pF	0402	Samsung	CL05C270JB5NNNC
C25	4,7uF	0603	Würth Elektronik eiSos	885012106005
C26	27pF	0402	Samsung	CL05C270JB5NNNC
C27	100nF	0402	Würth Elektronik eiSos	885012205037
C28	100nF	0402	Würth Elektronik eiSos	885012205037
C29	4,7uF	0603	Würth Elektronik eiSos	885012106005
C30	4,7uF	0603	Würth Elektronik eiSos	885012106005
C31	100nF	0402	Würth Elektronik eiSos	885012205037
C32	100nF	0402	Würth Elektronik eiSos	885012205037
C33	100nF	0402	Würth Elektronik eiSos	885012205037
C34	100nF	0402	Würth Elektronik eiSos	885012205037
C35	100nF	0402	Würth Elektronik eiSos	885012205037
C36	100nF	0402	Würth Elektronik eiSos	885012205037

Table 28: Bill of materials part 1

Part	Value	Pack	Manufacturer	NR
C37	100nF	0402	Würth Elektronik eiSos	885012205037
C38	100nF	0402	Würth Elektronik eiSos	885012205037
C39	100nF	0402	Würth Elektronik eiSos	885012205037
C40	100nF	0402	Würth Elektronik eiSos	885012205037
C41	100nF	0402	Würth Elektronik eiSos	885012205037
C42	100nF	0402	Würth Elektronik eiSos	885012205037
C43	100nF	0402	Würth Elektronik eiSos	885012205037
C44	100nF	0402	Würth Elektronik eiSos	885012205037
C45	n.m.	0402	n.m.	n.m.
C46	n.m.	0402	n.m.	n.m.
C47	n.m.	0402	n.m.	n.m.
C48	100pF	0402	Würth Elektronik eiSos	885012005061
C49	100pF	0402	Würth Elektronik eiSos	885012005061
C50	n.m.	0402	n.m.	n.m.
C51	n.m.	0402	n.m.	n.m.
C52	100nF	0402	Würth Elektronik eiSos	885012205037
C53	100nF	0402	Würth Elektronik eiSos	885012205037
C54	100nF	0402	Würth Elektronik eiSos	885012205037
C55	100nF	0402	Würth Elektronik eiSos	885012205037
C56	n.m.	0402	n.m.	n.m.
P1	2x6	THT	Würth Elektronik eiSos	61301221121
P2	n.m.	THT	n.m.	n.m.
P3	n.m.	THT	n.m.	n.m.
P4	n.m.	THT	n.m.	n.m.
CON1	Micro USB 2.0	SMT-THT	Würth Elektronik eiSos	629105150521
CON2	Jack Connector	THT	Würth Elektronik eiSos	694106301002
CON3	n.m.	THT	n.m.	n.m.
CON4	SMA	THT	Würth Elektronik eiSos	60312002114503
CON5	SMA	THT	Würth Elektronik eiSos	60312002114503
CON6	NanoSIM	SMT	Würth Elektronik eiSos	693043020611
CON7	n.m.	THT	n.m.	n.m.
CON8	n.m.	THT	n.m.	n.m.
CON9	n.m.	THT	n.m.	n.m.
D1	n.m.	SMT	n.m.	n.m.
D2	n.m.	SMT	n.m.	n.m.
D3	n.m.	SMT	n.m.	n.m.
D4	8231706A	SMT	Würth Elektronik eiSos	8231706A
D5	8231706A	SMT	Würth Elektronik eiSos	8231706A

Table 29: Bill of materials part 2

Part	Value	Pack	Manufacturer	NR
D6	BAT54	SOT323	ON Semiconductor	BAT54HT1G
IC1	WIRL-CLTI	SMT	Würth Elektronik eiSos	2615011136000
IC2	TLV1117IDCYR	SMT	Texas Instruments	TLV1117IDCYR
IC3	TLV1117LV18	SMT	Texas Instruments	TLV1117LV18DCY
IC4	TLV1117LV33	SMT	Texas Instruments	TLV1117LV33DCY
IC5	FT4232H-56Q	VQFN-56	FTDI	FT4232H-56Q
IC6	82400152	SMT	Würth Elektronik eiSos	82400152
IC7	SN74AVC4T245	SMT	Texas Instruments	SN74AVC4T245PWR
IC8	SN74AVC4T245	SMT	Texas Instruments	SN74AVC4T245PWR
IC9	SN74AVC4T245	SMT	Texas Instruments	SN74AVC4T245PWR
IC10	TS5A63157D	SMT	Texas Instrument	TS5A63157DCKR
IC11	TS5A63157D	SMT	Texas Instrument	TS5A63157DCKR
JP1	1x2	THT	Würth Elektronik eiSos	61300211121
JP2	1x2	THT	Würth Elektronik eiSos	61300211121
JP3	1x3	THT	Würth Elektronik eiSos	61300311121
JP4	2x8	THT	Würth Elektronik eiSos	61300821121
JP5	2x8	THT	Würth Elektronik eiSos	61300821121
JP6	2x8	THT	Würth Elektronik eiSos	61300821121
JP7	1x3	THT	Würth Elektronik eiSos	61300311121
JP8	n.m.	THT	n.m.	n.m.
L1	742792625	0603	Würth Elektronik eiSos	742792625
L2	742792625	0402	Würth Elektronik eiSos	7427927311
L3	742792625	0402	Würth Elektronik eiSos	7427927311
L4	742792625	0402	Würth Elektronik eiSos	7427927311
LED1	Red	0603	Würth Elektronik eiSos	150060RS75000
LED2	Blue	0603	Würth Elektronik eiSos	150060BS75000
Q1	12MHz +-20 ppm	SMT	Würth Elektronik eiSos	830070868
R1	221R	0402	Yageo	RC0402FR-07221RL
R2	118R	0402	Yageo	RC0402FR-07118RL
R3	2.2k	0402	Yageo	RC0402FR-072K2L
R4	10k	0402	Yageo	RC0402FR-0710KL
R5	100k	0402	Yageo	RC0402FR-07100KL
R6	2.2k	0402	Yageo	RC0402FR-072K2L
R10	10R	0402	Yageo	RC0402FR-0710RL
R11	10R	0402	Yageo	RC0402FR-0710RL
R12	12k	0402	Yageo	RC0402FR-0712KL
R13	1k	0402	Yageo	RC0402FR-071KL
R14	10R	0402	Yageo	RC0402FR-0710RL

Table 30: Bill of materials part 3

Part	Value	Pack	Manufacturer	NR
R15	10R	0402	Yageo	RC0402FR-0710RL
R16	10R	0402	Yageo	RC0402FR-0710RL
R17	10R	0402	Yageo	RC0402FR-0710RL
R18	10R	0402	Yageo	RC0402FR-0710RL
R19	10R	0402	Yageo	RC0402FR-0710RL
R20	10R	0402	Yageo	RC0402FR-0710RL
R21	10R	0402	Yageo	RC0402FR-0710RL
R22	10R	0402	Yageo	RC0402FR-0710RL
R23	10R	0402	Yageo	RC0402FR-0710RL
R24	10R	0402	Yageo	RC0402FR-0710RL
R25	10R	0402	Yageo	RC0402FR-0710RL
R26	10k	0402	Yageo	RC0402FR-0710KL
R27	10k	0402	Yageo	RC0402FR-0710KL
R33	4.7k	0402	Yageo	RC0402FR-074K7L
R34	0R	0402	Yageo	RC0402FR-070RL
R35	0R	0402	Yageo	RC0402FR-070RL
R36	10k	0402	Yageo	RC0402FR-0710KL
R37	10k	0402	Yageo	RC0402FR-0710KL
R38	n.m.	0402	n.m.	n.m.
R39	2.2k	0402	Yageo	RC0402FR-072K2L
R40	2.2k	0402	Yageo	RC0402FR-072K2L
R41	2.2k	0402	Yageo	RC0402FR-072K2L
R42	1k	0402	Yageo	RC0402FR-071KL
R43	10k	0402	Yageo	RC0402FR-0710KL
R44	1k	0402	Yageo	RC0402FR-071KL
R45	n.m.	0402	n.m.	n.m.
R46	1k	0402	Yageo	RC0402FR-071KL
R47	n.m.	0402	n.m.	n.m.
R48	1k	0402	Yageo	RC0402FR-071KL
R49	n.m.	0402	n.m.	n.m.
R50	1k	0402	Yageo	RC0402FR-071KL
S1	n.m.	SMT	n.m.	n.m.
S2	WS-TASV	SMT	Würth Elektronik eiSos	434121025816
S3	WS-TASV	SMT	Würth Elektronik eiSos	434121025816
T1	BSS138	TO-236-3	ON semiconductor	BSS138
T3	SSM3K56FS	SOT-416-3	Toshiba	SSM3K56FS
T4	SSM3K56FS	SOT-416-3	Toshiba	SSM3K56FS

Table 31: Bill of materials part 4

4 Regulatory compliance information

4.1 European Conformity

Pursuant to Article 1 (2.) of the EU directive 2014/53/EU, Article 1 (2.) the directive does not apply to equipment listed in Annex I (4.): custom-built evaluation kits designed for professionals to be used solely at research and development facilities for such purposes.

4.2 FCC

Pursuant to §2.803 (c) of Title 47 Chapter I Subchapter A Part 2 Subpart I, the evaluation kit falls under the FCC exception. Therefore it is marked as "For evaluation only; not FCC approved for resale".

4.3 Exemption clause

Relevant regulation requirements are subject to change. Würth Elektronik eiSos does not guarantee the accuracy of the before mentioned information. Directives, technical standards, procedural descriptions and the like may be interpreted differently by the national authorities. Equally, the national laws and restrictions may vary with the country. In case of doubt or uncertainty, we recommend that you consult with the authorities or official certification organizations of the relevant countries. Würth Elektronik eiSos is exempt from any responsibilities or liabilities related to regulatory compliance.

Notwithstanding the above, Würth Elektronik eiSos makes no representations and warranties of any kind related to their accuracy, correctness, completeness and/or usability for customer applications. No responsibility is assumed for inaccuracies or incompleteness.

5 Important notes

The following conditions apply to all goods within the wireless connectivity product range of Würth Elektronik eiSos GmbH & Co. KG:

5.1 General customer responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact, it is up to the customer to evaluate, where appropriate to investigate and to decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not. Accordingly, the customer is cautioned to verify that the documentation is current before placing orders.

5.2 Customer responsibility related to specific, in particular safety-relevant applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. The same statement is valid for all software sourcecode and firmware parts contained in or used with or for products in the wireless connectivity and sensor product range of Würth Elektronik eiSos GmbH & Co. KG. In certain customer applications requiring a high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health, it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component.

5.3 Best care and attention

Any product-specific data sheets, manuals, application notes, PCN's, warnings and cautions must be strictly observed in the most recent versions and matching to the products firmware revisions. This documents can be downloaded from the product specific sections on the wireless connectivity homepage.

5.4 Customer support for product specifications

Some products within the product range may contain substances, which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case, the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

5.5 Product improvements

Due to constant product improvement, product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard, we inform about major changes. In case of further queries regarding the PCN, the field sales engineer, the internal sales person or the technical support team in charge should be contacted. The basic responsibility of the customer as per section 5.1 and 5.2 remains unaffected. All wireless connectivity module driver software "wireless connectivity SDK" and its source codes as well as all PC software tools are not subject to the Product Change Notification information process.

5.6 Product life cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this, we cannot ensure that all products within our product range will always be available. Therefore, it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

5.7 Property rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG. Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

5.8 General terms and conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

6 Legal notice

6.1 Exclusion of liability

Würth Elektronik eiSos GmbH & Co. KG considers the information in this document to be correct at the time of publication. However, Würth Elektronik eiSos GmbH & Co. KG reserves the right to modify the information such as technical specifications or functions of its products or discontinue the production of these products or the support of one of these products without any written announcement or notification to customers. The customer must make sure that the information used corresponds to the latest published information. Würth Elektronik eiSos GmbH & Co. KG does not assume any liability for the use of its products. Würth Elektronik eiSos GmbH & Co. KG does not grant licenses for its patent rights or for any other of its intellectual property rights or third-party rights.

Notwithstanding anything above, Würth Elektronik eiSos GmbH & Co. KG makes no representations and/or warranties of any kind for the provided information related to their accuracy, correctness, completeness, usage of the products and/or usability for customer applications. Information published by Würth Elektronik eiSos GmbH & Co. KG regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof.

6.2 Suitability in customer applications

The customer bears the responsibility for compliance of systems or units, in which Würth Elektronik eiSos GmbH & Co. KG products are integrated, with applicable legal regulations. Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Würth Elektronik eiSos GmbH & Co. KG components in its applications, notwithstanding any applications-related information or support that may be provided by Würth Elektronik eiSos GmbH & Co. KG. Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences lessen the likelihood of failures that might cause harm and take appropriate remedial actions. The customer will fully indemnify Würth Elektronik eiSos GmbH & Co. KG and its representatives against any damages arising out of the use of any Würth Elektronik eiSos GmbH & Co. KG components in safety-critical applications.

6.3 Trademarks

AMBER wireless is a registered trademark of Würth Elektronik eiSos GmbH & Co. KG. All other trademarks, registered trademarks, and product names are the exclusive property of the respective owners.

6.4 Usage restriction

Würth Elektronik eiSos GmbH & Co. KG products have been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death,

unless the parties have executed an agreement specifically governing such use. Moreover, Würth Elektronik eiSos GmbH & Co. KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. Würth Elektronik eiSos GmbH & Co. KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component, which is used in electrical circuits that require high safety and reliability function or performance. By using Würth Elektronik eiSos GmbH & Co. KG products, the customer agrees to these terms and conditions.

7 License terms

This License Terms will take effect upon the purchase and usage of the Würth Elektronik eiSos GmbH & Co. KG wireless connectivity products. You hereby agree that this license terms is applicable to the product and the incorporated software, firmware and source codes (collectively, "Software") made available by Würth Elektronik eiSos in any form, including but not limited to binary, executable or source code form.

The software included in any Würth Elektronik eiSos wireless connectivity product is purchased to you on the condition that you accept the terms and conditions of this license terms. You agree to comply with all provisions under this license terms.

7.1 Limited license

Würth Elektronik eiSos hereby grants you a limited, non-exclusive, non-transferable and royalty-free license to use the software and under the conditions that will be set forth in this license terms. You are free to use the provided Software only in connection with one of the products from Würth Elektronik eiSos to the extent described in this license terms. You are entitled to change or alter the source code for the sole purpose of creating an application embedding the Würth Elektronik eiSos wireless connectivity product. The transfer of the source code to third parties is allowed to the sole extent that the source code is used by such third parties in connection with our product or another hardware provided by Würth Elektronik eiSos under strict adherence of this license terms. Würth Elektronik eiSos will not assume any liability for the usage of the incorporated software and the source code. You are not entitled to transfer the source code in any form to third parties without prior written consent of Würth Elektronik eiSos.

You are not allowed to reproduce, translate, reverse engineer, decompile, disassemble or create derivative works of the incorporated Software and the source code in whole or in part. No more extensive rights to use and exploit the products are granted to you.

7.2 Usage and obligations

The responsibility for the applicability and use of the Würth Elektronik eiSos wireless connectivity product with the incorporated Firmware in a particular customer design is always solely within the authority of the customer. Due to this fact, it is up to you to evaluate and investigate, where appropriate, and to decide whether the device with the specific product characteristics described in the product specification is valid and suitable for your respective application or not.

You are responsible for using the Würth Elektronik eiSos wireless connectivity product with the incorporated Firmware in compliance with all applicable product liability and product safety laws. You acknowledge to minimize the risk of loss and harm to individuals and bear the risk for failure leading to personal injury or death due to your usage of the product.

Würth Elektronik eiSos' products with the incorporated Firmware are not authorized for use in safety-critical applications, or where a failure of the product is reasonably expected to cause severe personal injury or death. Moreover, Würth Elektronik eiSos' products with the incorporated Firmware are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. You shall inform Würth Elektronik eiSos about the intent of such usage before design-in stage. In certain customer applications requiring a very high level of safety and in which the malfunction or failure of an electronic component could endanger human life or

health, you must ensure to have all necessary expertise in the safety and regulatory ramifications of your applications. You acknowledge and agree that you are solely responsible for all legal, regulatory and safety-related requirements concerning your products and any use of Würth Elektronik eiSos' products with the incorporated Firmware in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by Würth Elektronik eiSos. YOU SHALL INDEMNIFY WÜRTH ELEKTRONIK EISOS AGAINST ANY DAMAGES ARISING OUT OF THE USE OF WÜRTH ELEKTRONIK EISOS' PRODUCTS WITH THE INCORPORATED FIRMWARE IN SUCH SAFETY-CRITICAL APPLICATIONS.

7.3 Ownership

The incorporated Firmware created by Würth Elektronik eiSos is and will remain the exclusive property of Würth Elektronik eiSos.

7.4 Firmware update(s)

You have the opportunity to request the current and actual Firmware for a bought wireless connectivity Product within the time of warranty. However, Würth Elektronik eiSos has no obligation to update a modules firmware in their production facilities, but can offer this as a service on request. The upload of firmware updates falls within your responsibility, e.g. via ACC or another software for firmware updates. Firmware updates will not be communicated automatically. It is within your responsibility to check the current version of a firmware in the latest version of the product manual on our website. The revision table in the product manual provides all necessary information about firmware updates. There is no right to be provided with binary files, so called "Firmware images", those could be flashed through JTAG, SWD, Spi-Bi-Wire, SPI or similar interfaces.

7.5 Disclaimer of warranty

THE FIRMWARE IS PROVIDED "AS IS". YOU ACKNOWLEDGE THAT WÜRTH ELEKTRONIK EISOS MAKES NO REPRESENTATIONS AND WARRANTIES OF ANY KIND RELATED TO, BUT NOT LIMITED TO THE NON-INFRINGEMENT OF THIRD PARTIES' INTELLECTUAL PROPERTY RIGHTS OR THE MERCHANTABILITY OR FITNESS FOR YOUR INTENDED PURPOSE OR USAGE. WÜRTH ELEKTRONIK EISOS DOES NOT WARRANT OR REPRESENT THAT ANY LICENSE, EITHER EXPRESS OR IMPLIED, IS GRANTED UNDER ANY PATENT RIGHT, COPYRIGHT, MASK WORK RIGHT, OR OTHER INTELLECTUAL PROPERTY RIGHT RELATING TO ANY COMBINATION, MACHINE, OR PROCESS IN WHICH THE WÜRTH ELEKTRONIK EISOS' PRODUCT WITH THE INCORPORATED FIRMWARE IS USED. INFORMATION PUBLISHED BY WÜRTH ELEKTRONIK EISOS REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE A LICENSE FROM WÜRTH ELEKTRONIK EISOS TO USE SUCH PRODUCTS OR SERVICES OR A WARRANTY OR ENDORSEMENT THEREOF.

7.6 Limitation of liability

Any liability not expressly provided by Würth Elektronik eiSos shall be disclaimed. You agree to hold us harmless from any third-party claims related to your usage of the Würth Elektronik eiSos' products with the incorporated Firmware, software and source code. Würth

Elektronik eiSos disclaims any liability for any alteration, development created by you or your customers as well as for any combination with other products.

7.7 Applicable law and jurisdiction

Applicable law to this license terms shall be the laws of the Federal Republic of Germany. Any dispute, claim or controversy arising out of or relating to this license terms shall be resolved and finally settled by the court competent for the location of Würth Elektronik eiSos' registered office.

7.8 Severability clause

If a provision of this license terms is or becomes invalid, unenforceable or null and void, this shall not affect the remaining provisions of the terms. The parties shall replace any such provisions with new valid provisions that most closely approximate the purpose of the terms.

7.9 Miscellaneous

Würth Elektronik eiSos reserves the right at any time to change this terms at its own discretion. It is your responsibility to check at Würth Elektronik eiSos homepage for any updates. Your continued usage of the products will be deemed as the acceptance of the change.

We recommend you to be updated about the status of new firmware and software, which is available on our website or in our data sheet and manual, and to implement new software in your device where appropriate.

By ordering a wireless connectivity product, you accept this license terms in all terms.

List of Figures

1	Product image	5
2	4 COM ports detected - Adrastea command	7
3	MiniConsole start view- Adrastea command	7
4	SIM card detected- Adrastea command	8
5	Block diagram	9
6	Jumpers, default	10
7	Connectors and pin headers	13
8	Matching filter for GNSS transmission line	15
9	Matching filter for GNSS transmission line	16
10	Connectors and pin headers	20
11	UART Interface	23
12	Signal crossing and level shifting of the UART signals	24
13	Circuit diagram 1	26
14	Circuit diagram 2	27
15	Circuit diagram 3	28
16	Circuit diagram 4	29
17	Circuit diagram 5	30
18	Assembly diagram	31
19	Top layer (upper left), second layer (upper right), third layer (bottom left), fourth layer (bottom right)	32

List of Tables

1	Compatibility	5
2	Content Thyone-I EV-kit	5
3	Jumper JP1	11
4	Jumper JP2	11
5	JP3 input power selection	11
6	JP4 UART0 to USB communication - Miniconsole	11
7	JP5 UART1 to USB communication - Console logs	11
8	JP6 UART2 to USB communication - FW update	12
9	JP7 Isolation control of level shifter	12
10	JP8 debugging selector (not mounted)	12
11	Default assembled connectors and pin headers	14
12	Optional connectors	14
13	Micro-USB connector	14
14	Power jack	15
15	External power connection	15
16	SMA connector for GNSS	15
17	SMA connector for LTE	16
18	Nano SIMcard holder	16
19	2x3 right angle socket	17
20	2x3 socket	17
21	2x10 EJTAG connector	17
22	Pin header P1	18
23	Pin header P2	18
24	Pin header P3	19
25	Pin header P4	19

26	COM-PORT to UART assignment	23
27	COM-PORT to UART assignment	24
28	Bill of materials part 1	33
29	Bill of materials part 2	34
30	Bill of materials part 3	35
31	Bill of materials part 4	36



more than you expect



**Internet
of Things**



**Monitoring
& Control**



**Automated Meter
Reading**

Contact:

Würth Elektronik eiSos GmbH & Co. KG
Division Wireless Connectivity & Sensors

Max-Eyth-Straße 1
74638 Waldenburg
Germany

Tel.: +49 651 99355-0
Fax.: +49 651 99355-69
www.we-online.com/wireless-connectivity



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Elektronik:](#)

[2615029236001](#)